



Serving the Hire Industry and the Hire Industry only




NEW Equipment Sales

- Solar Hybrid Technology //
- Ready to Rent //
- Ultra Silenced Event Ready //
- Welfare Cabin Ready //
- Fusion Tin-12 //
- Railtrack Approved (RT) Trackside //
- Vandal Proof Generator Containers //
- Generator Accessories //

QUALITY RUGGED & RELIABLE POWER GENERATION

GENERATORS CATALOGUE



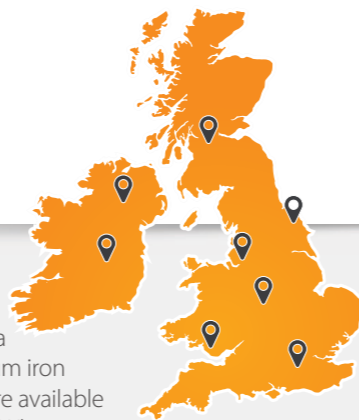

Welcome to the MHM Group generators brochure.

The MHM Group have been supplying UK and Ireland rental businesses with powerful, stable power generation solutions for over a decade.

The MHM power generation range encompasses; Ready to Rent, Event Ready, Welfare Cabin Ready, Fusion Tin-12, Railtrack Approved (RT) Trackside sets.

MHM have an expanding portfolio of sustainable, low-emission generators all powered by fuel-efficient diesel engines. To heighten the sustainable qualities of the engine-powered equipment, MHM champions the use of HVO (Hydrotreated Vegetable Oils) fuels. HVO fuel can be used in all MHM diesel powered products provided the fuel adheres to BS EN 15940:2016.

For enhanced sustainability, and low cost operation, MHM have introduced a line of solar battery hybrid generators. These self-charging sets offer decreased fuel costs, lower carbon emissions, and significantly reduced noise pollution.

'Intelligent' automatic start-stop generators are also included, and for safe portability, many of the MHM generators can be fitted onto a certified road tow trailer.

The MHM BatPack range are heavy-duty, robust emission-free battery packs which delivers a reliable power source from a lithium iron phosphate battery. BatPack sets are available from 1kVA/2kWh up to 30kVA/45kWh.

MHM is an official dealer for Honda inverter generators, with models from 1.25 to 8.5kVA.

A complete line of product related accessories are stocked. These include; vandal proof containers, trailers, site distribution boxes, fly leads, site transformers and load banks. MHM is a 'one-stop shop' for all power generation centred equipment.

MHM power generation products are fully certified and compliant with all current regulations. They have been designed and built exclusively for the rental markets, incorporating all the features and benefits that an end-user expects.

The MHM Group's manufacturing facility is based near Milan, Italy and has over 40 years' experience in producing a wide array of equipment for the global rental markets.

Need to know more?

Then get in touch with us on **+44 (0)808 168 9099** or email sales@mhm-group.co.uk

TALK TO US ON WHATSAPP +44 (0)7939 017614

Additional Support

The MHM Group recognise that in the UK and Ireland hire markets managing a modern, up-to-date hire fleet is a key element in maintaining a competitive advantage.

Consequently, MHM have brought together two solutions that will help support all hire firms allowing them to offer the very latest equipment to their customers.

PART EXCHANGE

MHM resolve to take:

- ✓ Any Equipment
- ✓ Any Model
- ✓ Any Quantity
- ✓ Any Age
- ✓ Any Brand
- ✓ Any Condition

In part exchange for any equipment from the MHM range.



GUARANTEED BUY BACK

MHM will buy-back any equipment supplied by MHM whether it's:

- ✓ A Runner, fully working
- ✓ A Non-Runner, but complete
- ✓ A Spares or Repairs, incomplete, i.e. missing some parts
- ✓ With fixed price, 1 to 10 year payment facilities

Naturally, there are some terms and conditions attached to these options which will be fully explained before any agreements are entered into.



To find out more about these two unique choices **contact a MHM Group representative.**

Contents //

Solar Hybrid Technology



Solar Hybrid Generators 4



Battery Packs 6



Solar Kit 8

Generators



Ready to Rent Petrol & Diesel Generators // Range 1.25-160kVA 9




Ultra Silenced Event Ready Diesel Generators // Range 20 - 100kVA 23



Welfare Cabin Ready Diesel Generators // Range 4-25kVA 26



Fusion (Tin 12) Petrol & Diesel Generators // Range 3-10kVA 35



Railtrack Approved (RT) Trackside Petrol & Diesel Generators // Range 3-5kVA 38

Vandal Proof Generator Containers



Vandal Proof Generator Containers 40

Generator Accessories



Trailers 41



EV Charging 43



Site Distribution Boxes 44



Fly Leads 46



Site Transformers ... 47



Load Banks 48

Ready to Rent //

Designed in the UK
Built in Italy

Solar Hybrid Generators //

When looking for a robust, reliable, good quality solar hybrid battery diesel generator look no further than our solar hybrid generator range.

- USE & STORE RENEWABLE POWER
- Self charging hybrid power you can trust
- NEVER BE WITHOUT POWER

MGTP 3500 SHG-5

Ready to Rent 3.5kVA
Solar Hybrid Battery Diesel Generator

Stage 5 Engine KOHLER LOMBARDINI 2 Year Engine Warranty (Limited)



Optional extras:

- Road-tow Kit
- GPS Telemetry Tracker
- Power Performance Telemetry
- Solar Kit

READY TO RENT SPECIFICATION
HVO FUEL APPROVED

MGTP 6000 SHG-5

Ready to Rent 6kVA
Solar Hybrid Battery Diesel Generator

Stage 5 Engine KOHLER LOMBARDINI 2 Year Engine Warranty (Limited)



Optional extras:

- Road-tow Kit
- GPS Telemetry Tracker
- Power Performance Telemetry
- Solar Kit

READY TO RENT SPECIFICATION
HVO FUEL APPROVED

MGTP 10000 SHG-5

Ready to Rent 10kVA
Solar Hybrid Battery Diesel Generator

Stage 5 Engine KOHLER LOMBARDINI 2 Year Engine Warranty (Limited)



Optional extras:

- Road-tow Kit
- GPS Telemetry Tracker
- Power Performance Telemetry
- Solar Kit

READY TO RENT SPECIFICATION
HVO FUEL APPROVED

Ready to Rent //

Designed in the UK
Built in Italy

Solar Hybrid Generators //

When looking for a robust, reliable, good quality solar hybrid battery diesel generator look no further than our solar hybrid generator range.

- USE & STORE RENEWABLE POWER
- Self charging hybrid power you can trust
- NEVER BE WITHOUT POWER

MGTP 20 SHG-5

Ready to Rent 20kVA
Solar Hybrid Battery Diesel Generator

Stage 5 Engine YANMAR 3 Year Engine Warranty (Limited)



Optional extras:

- Road-tow Kit
- GPS Telemetry Tracker
- Power Performance Telemetry
- Solar Kit

READY TO RENT SPECIFICATION
HVO FUEL APPROVED

MGTP 60 SHG-5

Ready to Rent 60kVA
Solar Hybrid Battery Diesel Generator

Stage 5 Engine KOHLER LOMBARDINI 2 Year Engine Warranty (Limited)



Optional extras:

- Road-tow Kit
- GPS Telemetry Tracker
- Power Performance Telemetry
- Solar Kit

READY TO RENT SPECIFICATION
HVO FUEL APPROVED

Features

- 3.5–10kVA combined solar, battery and diesel generator power
- Automatic self-charging Hybrid system
- Fully adjustable roof mounted high efficiency solar panel
- AGM sealed lead acid batteries
- Kohler diesel engine (Stage 5)
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Exclusive MHM engine protection shutdown system
- 3 way fuel valve
- Linz alternator
- Variable RCD
- Emergency stop button
- Internal bund alarm
- Fork pockets
- Fully bundled base (110%)

Benefits

- Ideal for low and variable temporary power applications over long periods of time
- Completely automatic with nice, simple and easy user friendly usability
- Providing power to support and maintain the internal batteries in all weather conditions
- Robust, durable and long lasting
- World class performance and water cooled
- Suitable to run off either diesel, HVO or a mixture of both fuels
- In the case of low fuel, low oil pressure, high engine temp and battery charge failure
- Easy connectivity to an external fuel tank
- Heavy duty and proven reliability
- Flexible protection
- A must on any UK site
- For added site safety
- For flexible, safe lifting
- To retain all spilt fluids

OPTIONAL EXTRA
215W SOLAR KIT
215W per panel
"Plug & Play"
Maximum of 4

Features

- 20–60kVA combined solar, battery and diesel generator power
- Automatic self-charging Hybrid system
- Fully adjustable roof mounted high efficiency solar panel / Fully adjustable electrically motorised (up/down) roof mounted high efficiency solar panels*
- Lithium batteries
- Yanmar/ Kohler* diesel engine (Stage 5)
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Exclusive MHM engine protection shutdown system
- 3 way fuel valve
- Linz/ Stamford* alternator
- Variable RCD
- Emergency stop button
- Internal bund alarm
- Fork pockets
- Fully bundled base (110%)

Benefits

- Ideal for low and variable temporary power applications over long periods of time
- Completely automatic with nice, simple and easy user friendly usability
- Providing power to support and maintain the internal batteries in all weather conditions
- Robust, durable and long lasting
- World class performance and water cooled
- Suitable to run off either diesel, HVO or a mixture of both fuels
- In the case of low fuel, low oil pressure, high engine temp and battery charge failure
- Easy connectivity to an external fuel tank
- Heavy duty and proven reliability
- Flexible protection
- A must on any UK site
- For added site safety
- For flexible, safe lifting
- To retain all spilt fluids

OPTIONAL EXTRA
215W SOLAR KIT
215W per panel
"Plug & Play"
Maximum of 4

* MGTP 60 SHG-5 only

Specification

Model	Max. Generator Output		Battery Storage	Noise Level			Battery	Engine Mode/ Battery Mode Switch Over		Solar Panel	Engine Make	Engine Type	Engine speed (RPM)	Cooling	Fuel Tank (L)	Diesel Generator Runtime 'Constant Load' @ 75% (Hrs)	Battery Runtime 'Constant Load' (Hrs)				Starting System	Dimensions – machine only (mm)			Sockets												
	230V–1ph	kVA		kWh	Gen Model	Battery Model		Engine Only	Battery Only								L	W	H	L		W	H	Dry Weight (No Fuel) (kg)	Wet Weight (Fuel Full) (kg)	1ph (230V)	3ph (400V)										
			32A																								16A	Output	Input	Output							
MGTP 3500 SHG-5	3.5	2.8	7.7	4 x 230	87	62	0	0	AGM Sealed Lead Acid	Over 2000W Load	Under 2000W Load	215W	Kohler	TBA (Stage 5)	1500	Water	200	111	1900W	1200W	600W	400W	28	4.7	Deepsea 3110	1730	1080	1520	2055	1050	1210	1	1	2	1	1	2
MGTP 6000 SHG-5	6	4.8	7.7	4 x 230	87	62	0	0	AGM Sealed Lead Acid	Over 2000W Load	Under 2000W Load	215W	Kohler	TBA (Stage 5)	1500	Water	200	111	1900W	1200W	600W	400W	21	4.7	Deepsea 3110	1730	1080	1520	2055	1050	1210	1	1	2	1	1	2
MGTP 10000 SHG-5	10	8	7.7	4 x 230	87	62	0	0	AGM Sealed Lead Acid	Over 2000W Load	Under 2000W Load	215W	Kohler	TBA (Stage 5)	1500	Water	200	111	1900W	1200W	600W	400W	14	4.7	Deepsea 3110	1730	1080	1520	2055	1050	1210	1	1	2	1	1	2

Sales leaflets containing full product specification available on request and can be found on our website.

Tel 0808 1689099 Email sales@mhm-group.co.uk
www.mhm-group.co.uk



All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.



Tel 0808 1689099 Email sales@mhm-group.co.uk
www.mhm-group.co.uk

All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.

Sales leaflets containing full product specification available on request and can be found on our website.

Specification

Ready to Rent // Battery Packs //

MHM BATPACK

Designed in the UK
Built in Italy



When looking for robust, reliable, good quality Ready to Rent battery storage pack look no further than our 1kVA–30kVA battery pack range.

Battery Storage Packs
Rugged & Reliable Power

Ready to Rent // Battery Packs //

MHM BATPACK

Designed in the UK
Built in Italy



When looking for robust, reliable, good quality Ready to Rent battery storage pack look no further than our 1kVA–30kVA battery pack range.

Battery Storage Packs
Rugged & Reliable Power

BatPack 1-2

1kVA/ 2kWh



READY TO RENT SPECIFICATION

ONLY 83kg

- Optional extras:
- Glass Panel Solar Kit
 - Vandal & Shatter-Proof Solar Kit
 - Power Performance Telemetry

BatPack 5-4 (110V)

5kVA/ 4kWh



READY TO RENT SPECIFICATION

ONLY 95kg

- Optional extras:
- Glass Panel Solar Kit
 - Vandal & Shatter-Proof Solar Kit
 - Power Performance Telemetry

BatPack 5-15

5kVA/ 15kWh

Most suitable to pair with a **10–20kVA** diesel generator



READY TO RENT SPECIFICATION

- Optional extras:
- Road-tow Kit
 - Glass Panel Solar Kit
 - Vandal & Shatter-Proof Solar Kit
 - Power Performance Telemetry

BatPack 10-20

10kVA/ 20kWh

Most suitable to pair with a **25–35kVA** diesel generator



READY TO RENT SPECIFICATION

- Optional extras:
- Road-tow Kit
 - Glass Panel Solar Kit
 - Vandal & Shatter-Proof Solar Kit
 - Power Performance Telemetry

BatPack 30-45

30kVA/ 45kWh

Most suitable to pair with a **45–150kVA** diesel generator



READY TO RENT SPECIFICATION

- Optional extras:
- Road-tow Kit
 - Glass Panel Solar Kit
 - Vandal & Shatter-Proof Solar Kit
 - Power Performance Telemetry

Features

- Battery power storage
- Lithium iron phosphate battery
- Battery charge level indicator
- (AGS/S) Auto generator Start/Stop (BatPack 5-15 only)
- Robust carry handle and wheels/ Fork pockets
- 16A to 32A sockets
- Recharge plug or socket
- Solar panel compatible

Benefits

- Suitable for very light to light power requirements on site
- Heavy, duty, robust & proven reliability
- Clearly shows battery charge status (ie. low or full)
- Connect to generator for auto Start/Stop facility
- Easy to lift, manage and transport/ For flexible and safe lifting on site
- Easy plug & play connectivity
- Recharge from mains or a suitable size generator
- Connect to a solar kit for renewable power recharge

Features

- Battery power storage
- Lithium iron phosphate battery
- Battery charge level indicator
- (AGS/S) Auto generator Start/Stop
- Fork pockets and lifting eyes
- 32A to 63A sockets
- Recharge socket or cable
- Solar panel compatible

Benefits

- Suitable for medium to large power requirements on site
- Heavy, duty, robust & proven reliability
- Clearly shows battery charge status (ie. low or full)
- Connect to generator for auto Start/Stop facility
- For flexible and safe lifting on site
- Easy plug & play connectivity
- Recharge from mains or a suitable size generator
- Connect to a solar kit for renewable power recharge

Specification

Model	Performance				Battery Run Time @ Constant Load	Battery							Dimensions – battery only (mm)				Socket Configuration						
	Maximum Power Output kVA	Battery Capacity kWh	Output Voltage	Recharge Time Hours		Battery Type	No. of Batteries	Cooling	Protection	Depth of Discharge (DOD)	Safe Operating Temperature	Safe Storage Time (not in use & not in charge)	Self Discharge	Cycle Time	L	W	H	Kg	Output Plug		Input Plug		
																			16A	32A	16A	16A	
BatPack 1-2	1	2	230V (1ph)/50Hz	10@8A	1kVA / 4A: 2 Hrs 0.5kVA / 2A: 4 Hrs	Lithium Iron Phosphate	1	Air	IP20	80%	-25 to 40°C	6 Months	2% per month	6000 Cycles	600	450	430	370	-	1	-	-	1
BatPack 5-4 (110V)	5	4	110V (1ph)/50Hz	4@12A	5kVA / 20A: 45 Mins 2.5kVA / 10A: 1½ Hrs 1kVA / 4A: 3½ Hrs	Lithium Iron Phosphate	1	Air	IP44	80%	-25 to 40°C	6 Months	2% per month	6000 Cycles	TBA	TBA	TBA	95	1	-	-	1	-
BatPack 5-15	5	15	230V (1ph)/50Hz	4@16A	5kVA / 20A: 2 Hrs 2kVA / 5A: 13 Hrs 0.5kVA / 2A: 25 Hrs	Lithium Iron Phosphate	3	Air	IP44	80%	-25 to 40°C	6 Months	2% per month	6000 Cycles	1040	1010	810	370	-	-	1	-	1

Note: Dimensions and weights are 'machine only'. BatPack 1-2 dimensions are 'handles down'.

Specification

Model	Performance				Battery Run Time @ Constant Load	Battery							Dimensions – battery only (mm)				Socket Configuration					
	Maximum Power Output kVA	Battery Capacity kWh	Output Voltage	Recharge Time Hours		Battery Type	No. of Batteries	Cooling	Protection	Depth of Discharge (DOD)	Safe Operating Temperature	Safe Storage Time (not in use & not in charge)	Self Discharge	Cycle Time	L	W	H	Kg	Output Plug		Input Plug	
																			32A	63A	32A	63A
BatPack 10-20	10	20	230V (1ph)/50Hz	4@20A	10kVA / 40A: 1½ Hrs 6kVA / 24A: 3 Hrs 3kVA / 12A: 7 Hrs 0.5kVA / 2A: 30 Hrs	Lithium Iron Phosphate	16	Air	IP44	80%	-25 to 40°C	6 Months	2% per month	6000 Cycles	1700	800	1750	750	1	-	1	-
BatPack 30-45	30	45	400V (3ph)/50Hz	3@100A	45kVA / 45A: N/A 30kVA / 30A: 1½ Hrs 15kVA / 15A: 2½ Hrs 1kVA / 1A: 45 Hrs	Lithium Iron Phosphate	10	Air	IP44	80%	-25 to 40°C	6 Months	2% per month	6000 Cycles	1570	1270	1700	1200	-	1	-	1



Ready to Rent //

Solar Kit //



Designed in the UK
Built in Italy

Looking to maximise on renewable energy?
Well, our plug & play Solar Kit is the answer.

Solar Kit is compatible with the following MHM Solar Hybrid Models:
MGTP 3500 SHG-5
MGTP 6000 SHG-5
MGTP 10000 SHG-5
MGTP 20 SHG-5
MGTP 60 SHG-5



Simply
**CONNECT TO
SOLAR HYBRID
GENERATOR
in minutes**

Features

- 215W high efficiency solar panel
- Easy tilt design
- Robust, strong and durable galvanised frame
- Stackable design
- Fork pockets and lifting eye

Benefits

- Ready for work in any conditions
- Position panel angle with ease
- Designed for a rental and construction environment
- Stack up to five high for easy transport and storage
- For flexible and safe lifting

Ready to Rent Petrol & Diesel //

Generators //



When looking for robust, reliable, good quality Ready to Rent petrol or diesel generators look no further than our 1.25–160kVA generator range.

Extra Super Silent
Rugged & Reliable Power

EU10i
Ready to Rent
1.25kVA Petrol Generator

Stage 5 Engine **POWERED BY HONDA** GX Engine 5 Year Warranty (Limited)



READY TO RENT SPECIFICATION
Extra Super Silent
77LWA / 52dBa @ 7m
ONLY 13kg

EU22i
Ready to Rent
2.75kVA Petrol Generator

Stage 5 Engine **POWERED BY HONDA** GX Engine 5 Year Warranty (Limited)



READY TO RENT SPECIFICATION
Extra Super Silent
77LWA / 52dBa @ 7m
ONLY 21kg

EU30is
Ready to Rent
3.75kVA Petrol Generator

Stage 5 Engine **POWERED BY HONDA** GX Engine 5 Year Warranty (Limited)



READY TO RENT SPECIFICATION
Extra Super Silent
74LWA / 49dBa @ 7m

Features

- 1.25–3.75kVA (230V) AC Power
- Unique Honda inverter alternator
- Extra Super Silent metal and plastic construction
- Low oil alert
- From only 13kgs to 61kgs
- Complete with carry handle or trolley kit*

Benefits

- Power to run a variety of small tools & equipment on site
- Heavy duty and proven reliability
- Super quiet, robust and durable
- Automatically shuts down engine if engine oil is low
- Extremely lightweight and portable
- For nice and easy manoeuvrability, transport and storage

* Trolley kit on EU30is only

Specification

Model	Dimensions						Weight
	Transport/ storage mode (panel down)			Operating mode (panel up/tilted)			
	L	W	H	L	W	H	
Solar Kit	1740 mm	975 mm	325 mm	1740 mm	975 mm	675 mm	85kg

Model	Single Phase Power		Noise Level		Engine Make	Engine Type	Alternator	Fuel Type	Number of Cylinders	Power (HP)	Engine Speed (RPM)	Cooling	Fuel Consumption @ 75% Load (Litres/hour)	Fuel Tank Capacity (L)	Average Runtime (Hours) @ 75% Load	CO ₂ Per Hour @ 75% Load (kg)	Starting System	Dimensions – machine only (mm)			Dry Weight (No Fuel)	Wet Weight (Fuel Full)	Socket configuration		
	kVA	kW	LWA	dBa@7m														L	W	H			1ph (230V)		
																							32A	16A	13A
EU10i	1.25	1	77	52	Honda	GX150 (Stage 5)	Honda Inverter	Petrol	1	-	Variable 'Max 4500'	Forced Air	0.5	2.1	4	1.15	Recoil	451	242	379	13kg	15kg	-	-	1
EU22i	2.75	2.2	77	52	Honda	GXR120 (Stage 5)	Honda Inverter	Petrol	1	-	Variable 'Max 4500'	Forced Air	1	3.6	3.5	2.31	Recoil	512	290	425	21kg	24.5kg	-	-	2
EU30is	3.75	3	74	49	Honda	GX200 (Stage 5)	Honda Inverter	Petrol	1	6.5	Variable 'Max 3800'	Forced Air	1.6	13	8	3.70	Recoil & Electric	658	482	570	61kg	74kg	-	-	2

Specification



Ready to Rent Petrol & Diesel //

Generators // Range 1.25–160kVA



When looking for robust, reliable, good quality Ready to Rent petrol or diesel generators look no further than our 1.25–160kVA generator range.

Silent, Super Silent & Extra Super Silent
Rugged & Reliable Power

Ready to Rent Petrol & Diesel //

Generators // Range 1.25–160kVA



When looking for robust, reliable, good quality Ready to Rent petrol or diesel generators look no further than our 1.25–160kVA generator range.

Silent, Super Silent & Extra Super Silent
Rugged & Reliable Power

EU70is
Ready to Rent
8.75kVA Petrol Generator

MG 3000
Ready to Rent
3kVA Petrol Generator

MG 3500
Ready to Rent
3.5kVA Petrol Generator

MG 5000
Ready to Rent
5kVA Petrol Generator

MG 6500
Ready to Rent
6.5kVA Petrol Generator

MG 10000
Ready to Rent
10kVA Petrol Generator

Stage 5 Engine **POWERED BY HONDA** GX Engine 5 Year Warranty (Limited)

Stage 5 Engine **POWERED BY HONDA** GX Engine 3 Year Warranty (Limited)

Stage 5 Engine **POWERED BY HONDA** GX Engine 3 Year Warranty (Limited)

Stage 5 Engine **POWERED BY HONDA** GX Engine 3 Year Warranty (Limited)

Stage 5 Engine **POWERED BY HONDA** GX Engine 3 Year Warranty (Limited)

Stage 5 Engine **POWERED BY HONDA** GX Engine 3 Year Warranty (Limited)



Extra Super Silent
74LWA / 49dBa @ 7m



Optional extras: Longrun tank



Optional extras: Longrun tank



Optional extras: Trolley kit Longrun tank



Optional extras: Trolley kit Longrun tank



Optional extras: Trolley kit

Features

- 3–8.75kVA (230V) AC Power
- Unique Honda inverter alternator* or NSM alternator
- Extra Super Silent metal and plastic construction
- Strong wrap around frame
- Low oil alert
- From only 37kgs to 118kgs
- Complete with trolley kit and folding handles†

Benefits

- Power to run a variety of small tools & equipment on site
- Heavy duty and proven reliability
- Super quiet, robust and durable
- Great protection in a rental environment
- Automatically shuts down engine if engine oil is low
- Extremely lightweight and portable
- For nice and easy manoeuvrability, transport and storage

Features

- 5–10kVA (230V/110V) AC Aux Power
- NSM alternator
- Honda petrol engine (Stage 5)
- Metal top box for alternator & strong wrap around frame
- All low kgs

Benefits

- Plenty of power to run a variety of tools on site
- Heavy duty and proven reliability
- Power, reliability & robust strength
- Great protection in rental environment
- Extremely light weight

Specification

Model	Single Phase Power				Noise Level		Engine Make	Engine Type	Alternator	Fuel Type	Number of Cylinders	Power (HP)	Engine Speed (RPM)	Cooling	Fuel Consumption @ 75% Load (Litres/hour)	Fuel Tank Capacity (L)	Average Runtime @ 75% Load (Hours)	CO ₂ Per Hour @ 75% Load (kg)	Starting System	Dimensions machine only (mm)**			Socket configuration					
	110V		230V		LWA	dBa@7m														L	W	H	Dry Weight (No Fuel)	Wet Weight (Fuel Full)	1ph (230V)		1ph (110V)	
	kVA	kW	kVA	kW	dBa@7m	32A																			16A	32A	16A	
EU70is	N/A	N/A	8.75	7	74	49	Honda	GX390 (Stage 5)	Honda Inverter	Petrol	1	13	Variable *Max 3600	Forced Air	3	19.5	6.5	6.93	Recoil & Electric	850	700	721	118kg	137kg	1	2	-	-
MG 3000	3	2.4	3	2.4	94	69	Honda	GX160 (Stage 5)	NSM K80B	Petrol	1	5.5	3000	Air	1	3.1	3.1	2.31	Recoil	610	420	415	34kg	37kg	-	1	-	1
MG 3500	3.5	2.8	3.5	2.8	96	71	Honda	GX200 (Stage 5)	NSM K80C	Petrol	1	6.5	3000	Air	1	3.1	2.5	2.31	Recoil	610	420	415	43kg	46kg	-	2	1	1

** See separate data sheet for all dimensions.

Specification

Model	Single Phase Power				Noise Level		Engine Make	Engine Type	Alternator	RPM	Cooling	Fuel Consumption @ 75% Load (Litres/hour)	Fuel Tank (L)	Average Runtime @ 75% Load (Hours)	CO ₂ Per Hour @ 75% Load (kg)	Starting System	Dimensions machine only (mm)**			Socket configuration					
	230V		110V		LWA	dBa@7m											L	W	H	Dry Weight (No Fuel)	Wet Weight (Fuel Full)	1ph (230V)		1ph (110V)	
	kVA	kW	kVA	kW	dBa@7m	32A																16A	32A	16A	
MG 5000	5	4	5	4	97	72	Honda	GX270 (Stage 5)	NSM K100F	3000	Air	1.9	5.3	2.7	4.39	Recoil	690	480	540	59kg	64kg	-	2	1	1
MG 6500	6.5	5.2	6.5	5.2	96	71	Honda	GX390 (Stage 5)	NSM C100SG	3000	Air	2.7	6.1	2.2	6.24	Recoil	690	480	540	71kg	77kg	1	2	1	2
MG 10000	10	8	10	8	100	75	Honda	GX630 (Stage 5)	NSM M1125B	3000	Air	3.2	18	5.5	7.39	Electric	800	575	680	110kg	128kg	1	1	1	2

** See separate data sheet for all dimensions.



Ready to Rent Petrol & Diesel //

Designed in the UK
Built in Italy

Generators // Range 1.25–160kVA



When looking for robust, reliable, good quality Ready to Rent petrol or diesel generators look no further than our 1.25–160kVA generator range.

Silent, Super Silent & Extra Super Silent
Rugged & Reliable Power

Ready to Rent Petrol & Diesel //

Designed in the UK
Built in Italy

Generators // Range 1.25–160kVA



When looking for robust, reliable, good quality Ready to Rent petrol or diesel generators look no further than our 1.25–160kVA generator range.

Silent, Super Silent & Extra Super Silent
Rugged & Reliable Power

MG 3000 SD-5

Ready to Rent
3kVA Diesel Generator

Stage 5 Engine **KOHLER** 2 Year Engine Warranty (Limited)

MG 3000 SD-5/ES

Ready to Rent
3kVA Diesel Generator

Stage 5 Engine **KOHLER** 2 Year Engine Warranty (Limited)

MG 4000 SD-5

Ready to Rent
4kVA Diesel Generator

Stage 5 Engine **KOHLER** 2 Year Engine Warranty (Limited)

MG 4000 SD-5/ES

Ready to Rent
4kVA Diesel Generator

Stage 5 Engine **KOHLER** 2 Year Engine Warranty (Limited)

MG 6000 SSY-5-ECO

Ready to Rent
6kVA Eco Diesel Generator

Stage 5 Engine **YANMAR** 3 Year Engine Warranty (Limited)

MG 6000 SSY-5

Ready to Rent
6kVA Diesel Generator

Stage 5 Engine **YANMAR** 3 Year Engine Warranty (Limited)



Features

- 3–4kVA (230V/110V) AC Aux Power
- Linz alternator
- Kohler/ Lombardini diesel engine (Stage 5)
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Complete with trolley kit + folding handles
- All low kgs
- Recoil or electric* starting system

Benefits

- Plenty of power to run a variety of tools on site
- Heavy duty and proven reliability
- Recoil start, power, reliability and robust strength
- Suitable to run off either diesel, HVO or a mixture of both fuels
- For nice and easy manoeuvrability and storage
- Lightweight design
- Simple and easy start

Features

- Eco Auto Start/Stop mode* allows the generator to automatically start & stop according to generator power demand
- 4–6kVA (230V / 110V) AC Aux Power
- Linz alternator
- Kohler or Yanmar electric start diesel engine (Stage 5)
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Exclusive MHM engine protection shutdown system†
- Emergency stop button†
- Central lifting eye and front & side fork pockets†
- Fully bundled base (110%)†
- Complete with trolley kit + folding handles

Benefits

- The Eco system reduces noise, fuel consumption and carbon emissions
- Plenty of power to meet the demands of small generator hire
- Heavy duty and proven reliability
- Power, reliability and robust strength
- Suitable to run off either diesel, HVO or a mixture of both fuels
- In the case of low fuel, low oil pressure and battery charge failure
- A must on any UK site
- Flexible and safe lifting on site
- To retain all spilt fluids
- For nice and easy manoeuvrability, transport and storage

* MG 3000 SD-5/ES only

* Eco Auto Start/Stop mode - MG 6000 SSY-5-ECO only
† Start/Stop mode works with select power tools only.
+ MG 6000 SSY-5-ECO and MG 6000 SSY-5 only

Specification

Model	Single Phase Power				Noise Level		Engine Make	Engine Type	RPM	Cooling	Fuel Consumption @ 75% Load (litres/hour)	Fuel Tank (L)	Average Runtime @ 75% Load (Hours)	CO ₂ Per Hour @ 75% Load (kg)	Starting System	Dimensions – trolley kit with handles folded out (mm)**						Socket configuration			
	230V		110V		LWA	dBa@7m										L	W	H	Dry Weight (No Fuel)	Wet Weight (Fuel Full)	1ph (230V)		1ph (110V)		
	kVA	kW	kVA	kW																	32A	16A	32A	16A	
MG 3000 SD-5	3	2.4	3	2.4	94	69	Kohler/ Lombardini	15LD350 (Stage 5)	3000	Air	0.7	13	17	1.83	Recoil	1460	750	725	74kg	87kg	-	1	-	1	-
MG 3000 SD-5/ES	3	2.4	3	2.4	94	69	Kohler/ Lombardini	15LD350 (Stage 5)	3000	Air	0.7	13	17	1.83	Electric	1460	750	725	96kg	109kg	-	1	-	1	-
MG 4000 SD-5	4	3.2	4	3.2	95	70	Kohler/ Lombardini	15LD350 (Stage 5)	3000	Air	1	13	13	2.62	Recoil	1460	750	725	88kg	101kg	-	1	1	1	1

** See separate data sheet for all dimensions.

** See separate data sheet for all dimensions.

Model	Single Phase Power				Noise Level		Engine Make	Engine Type	Alternator	RPM	Cooling	Fuel Consumption @ 75% Load (litres/hour)	Fuel Tank (L)	Average Runtime @ 75% Load (Hours)	CO ₂ Per Hour @ 75% Load (kg)	Starting System	Dimensions – trolley kit with handles folded out (mm)**						Socket configuration			
	230V		110V		LWA	dBa@7m											L	W	H	Dry Weight (No Fuel)	Wet Weight (Fuel Full)	1ph (230V)		1ph (110V)		
	kVA	kW	kVA	kW																		32A	16A	32A	16A	
MG 4000 SD-5/ES	4	3.2	4	3.2	95	70	Kohler Lombardini	15LD350 (Stage 5)	Linz	3000	Air	1	13	13	2.62	Electric	1460	750	725	96kg	109kg	-	1	1	1	1
MG 6000 SSY-5-ECO	6	4.8	6	4.8	90	65	Yanmar	L100AE (Stage 5)	Linz	3000	Air	1.4	25	18	3.67	Key Start	1570	760	980	207kg	228kg	1	1	1	1	2
MG 6000 SSY-5	6	4.8	6	4.8	90	65	Yanmar	L100AE (Stage 5)	Linz	3000	Air	1.4	25	18	3.67	Deepsea 3110 c/w Auto Start/Stop	1570	760	980	207kg	228kg	1	1	1	1	2

Specification



All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)

Sales leaflets containing full product specification available on request and can be found on our website.

Tel 0808 1689099 Email sales@mhm-group.co.uk
www.mhm-group.co.uk



All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.



Tel 0808 1689099 Email sales@mhm-group.co.uk
www.mhm-group.co.uk

All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.

Sales leaflets containing full product specification available on request and can be found on our website.

All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)



Ready to Rent Petrol & Diesel //

Designed in the UK
Built in Italy

Generators // Range 1.25-160kVA



When looking for robust, reliable, good quality Ready to Rent petrol or diesel generators look no further than our 1.25-160kVA generator range.

Silent, Super Silent & Extra Super Silent
Rugged & Reliable Power

Ready to Rent Petrol & Diesel //

Designed in the UK
Built in Italy

Generators // Range 1.25-160kVA



When looking for robust, reliable, good quality Ready to Rent petrol or diesel generators look no further than our 1.25-160kVA generator range.

Silent, Super Silent & Extra Super Silent
Rugged & Reliable Power

MG 6000 E/SSY-5

Ready to Rent
6kVA Diesel Generator

Stage 5 Engine **YANMAR**
3 Year Engine Warranty (Limited)

MG 6000 SSK

Ready to Rent
6kVA Diesel Generator

Stage 3 Engine **Kubota**
2 Year Engine Warranty (Limited)

MG 8000 SSK

Ready to Rent
8kVA Diesel Generator

Stage 3 Engine **Kubota**
2 Year Engine Warranty (Limited)

MG 8000 SSKH-5

Ready to Rent
8kVA Diesel Generator

Stage 5 Engine **KOHLER**
2 Year Engine Warranty (Limited)

MG 10000 SSK-ECO

Ready to Rent
10kVA Eco Diesel Generator

Stage 3 Engine **Kubota**
2 Year Engine Warranty (Limited)

MG 10000 SSK

Ready to Rent
10kVA Diesel Generator

Stage 3 Engine **Kubota**
2 Year Engine Warranty (Limited)



Optional extras: Road-tow Kit, GPS Telemetry Tracker

Optional extras: Road-tow Kit, GPS Telemetry Tracker

Optional extras: Road-tow Kit, GPS Telemetry Tracker

Optional extras: Road-tow Kit, GPS Telemetry Tracker

Optional extras: Road-tow Kit, GPS Telemetry Tracker

Optional extras: Road-tow Kit, GPS Telemetry Tracker

Features

- 6-8kVA (230V / 110V) AC Aux Power
- Linz alternator
- Yanmar (Stage 5) or Kubota (Stage 3) electric start diesel engine
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Exclusive MHM engine protection shutdown system
- Emergency stop button
- Central lifting eye and front & side fork pockets
- Fully bundled base (110%)
- Complete with trolley kit + folding handles

Benefits

- Plenty of power to meet the demands of small generator hire
- Heavy duty and proven reliability
- Power, reliability and robust strength
- Suitable to run off either diesel, HVO or a mixture of both fuels
- In the case of low fuel, low oil pressure and battery charge failure
- A must on any UK site
- Flexible and safe lifting on site
- To retain all spilt fluids
- For nice and easy manoeuvrability, transport and storage

Features

- Eco Auto Start/Stop mode*** allows the generator to automatically start & stop according to generator power demand
- 8-10kVA (230V / 110V) AC Aux Power
- Linz alternator
- Kohler (Stage 5) or Kubota (Stage 3) diesel engine
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Exclusive MHM engine protection shutdown system
- Emergency stop button
- Central lifting eye and front & side fork pockets
- Fully bundled base (110%)
- Complete with trolley kit + folding handles

Benefits

- The Eco system reduces noise, fuel consumption and carbon emissions
- Plenty of power to meet the demands of small generator hire
- Heavy duty and proven reliability
- Power, reliability and robust strength
- Suitable to run off either diesel, HVO or a mixture of both fuels
- In the case of low fuel, low oil pressure and battery charge failure
- A must on any UK site
- Flexible and safe lifting on site
- To retain all spilt fluids
- For nice and easy manoeuvrability, transport and storage

Specification

Model	Single Phase Power				Noise Level		Engine Make	Engine Type	Alternator	RPM	Cooling	Fuel Consumption @ 75% load (litres/hour)	Fuel Tank (L)	Average Runtime @ 75% Load (Hours)	CO ₂ Per Hour @ 75% Load (kg)	Starting System	Dimensions - trolley kit with handles folded out (mm)**			Dry Weight (No Fuel)	Wet Weight (Fuel Full)	Socket configuration			
	230V		110V		LWA	dBa@7m											L	W	H			1ph (230V)		1ph (110V)	
	kVA	kW	kVA	kW																		32A	16A	32A	16A
MG 6000 E/SSY-5	6	4.8	6	4.8	84	59	Yanmar	L100AE (Stage 5)	Linz	3000	Air	1.4	25	18	3.67	Deepsea 3110 c/w Auto Start/Stop	1545	835	977	224kg	249kg	1	1	1	2
MG 6000 SSK	6	4.8	6	4.8	89	64	Kubota	Z482 (Stage 3)	Linz	3000	Water	1.8	40	22	4.72	Deepsea 3110 c/w Auto Start/Stop	1635	940	980	355kg	386kg	1	1	1	2
MG 8000 SSK	8	6.4	8	6.4	89	64	Kubota	D722E (Stage 3)	Linz	3000	Water	2.4	40	16	6.29	Deepsea 3110 c/w Auto Start/Stop	1635	940	980	361kg	392kg	1	2	2	1

** See separate data sheet for all dimensions.

Specification

Model	Single Phase Power				Noise Level		Engine Make	Engine Type	Alternator	RPM	Cooling	Fuel Consumption @ 75% load (litres/hour)	Fuel Tank (L)	Average Runtime @ 75% Load (Hours)	CO ₂ Per Hour @ 75% Load (kg)	Starting System	Dimensions - trolley kit with handles folded out (mm)**			Dry Weight (No Fuel)	Wet Weight (Fuel Full)	Socket configuration			
	230V		110V		LWA	dBa@7m											L	W	H			1ph (230V)		1ph (110V)	
	kVA	kW	kVA	kW																		32A	16A	32A	16A
MG 8000 SSKH-5	8	6.4	8	6.4	89	64	Kohler	KDW 702 (Stage 5)	Linz	3000	Water	2.8	35	12.5	7.34	Deepsea 3110 c/w Auto Start/Stop	1785	1030	1050	375kg	404kg	1	2	2	1
MG 10000 SSK-ECO	10	8	10	8	89	64	Kubota	D722E (Stage 3)	Linz	3000	Water	2.8	40	14	7.34	Key Start	1635	940	980	365kg	396kg	1	1	2	1
MG 10000 SSK	10	8	10	8	89	64	Kubota	D722E (Stage 3)	Linz	3000	Water	2.8	40	14	7.34	Deepsea 3110 c/w Auto Start/Stop	1635	940	980	365kg	396kg	1	2	2	1

** See separate data sheet for all dimensions.



All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)

Sales leaflets containing full product specification available on request and can be found on our website.

Tel 0808 1689099 Email sales@mhm-group.co.uk
www.mhm-group.co.uk



All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.



Tel 0808 1689099 Email sales@mhm-group.co.uk
www.mhm-group.co.uk

All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.

Sales leaflets containing full product specification available on request and can be found on our website.

All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)



Ready to Rent Petrol & Diesel //

Designed in the UK
Built in Italy

Generators // Range 1.25-160kVA



When looking for robust, reliable, good quality Ready to Rent petrol or diesel generators look no further than our 1.25-160kVA generator range.

Silent, Super Silent & Extra Super Silent
Rugged & Reliable Power

Ready to Rent Petrol & Diesel //

Designed in the UK
Built in Italy

Generators // Range 1.25-160kVA



When looking for robust, reliable, good quality Ready to Rent petrol or diesel generators look no further than our 1.25-160kVA generator range.

Silent, Super Silent & Extra Super Silent
Rugged & Reliable Power

MG 10000 SSK-3PH

Ready to Rent
10kVA Diesel Generator

Stage 3 Engine **Kubota** 2 Year Engine Warranty (Limited)



- READY TO RENT SPECIFICATION
- Water Cooled Extra Super Silent
- HVO FUEL APPROVED

Optional extras: Road-tow Kit, GPS Telemetry Tracker

MG 10000 SSKH-5-ECO

Ready to Rent
10kVA Eco Diesel Generator

Stage 5 Engine **KOHLER** 2 Year Engine Warranty (Limited)



- READY TO RENT SPECIFICATION
- Water Cooled Extra Super Silent
- HVO FUEL APPROVED
- ECO AUTO START/STOP

Optional extras: Road-tow Kit, GPS Telemetry Tracker

MG 10000 SSKH-5

Ready to Rent
10kVA Diesel Generator

Stage 5 Engine **KOHLER** 2 Year Engine Warranty (Limited)



- READY TO RENT SPECIFICATION
- Water Cooled Extra Super Silent
- HVO FUEL APPROVED

Optional extras: Road-tow Kit, GPS Telemetry Tracker

MG 10000 SSKH-5-3PH

Ready to Rent
10kVA Diesel Generator

Stage 5 Engine **KOHLER** 2 Year Engine Warranty (Limited)



- READY TO RENT SPECIFICATION
- Water Cooled Extra Super Silent
- HVO FUEL APPROVED

Optional extras: Road-tow Kit, GPS Telemetry Tracker

MG 15000 SSK-MV

Ready to Rent
15kVA Diesel Generator

Stage 3 Engine **Kubota** 2 Year Engine Warranty (Limited)



- READY TO RENT SPECIFICATION
- Water Cooled Extra Super Silent
- HVO FUEL APPROVED
- Multi Voltage 400V 230V 110V

Optional extras: Road-tow Kit, Trolley kit, GPS Telemetry Tracker

MG 15000 SSY-5-MV

Ready to Rent
15kVA Diesel Generator

Stage 5 Engine **YANMAR** 3 Year Engine Warranty (Limited)



- READY TO RENT SPECIFICATION
- Water Cooled Extra Super Silent
- HVO FUEL APPROVED
- Multi Voltage 400V 230V 110V

Optional extras: Road-tow Kit, Trolley kit, GPS Telemetry Tracker

Features

- Eco Auto Start/Stop mode* allows the generator to automatically start & stop according to generator power demand
- 10kVA (230V / 110V) AC Aux Power
- Linz alternator
- Kubota (Stage 3) or Kohler (Stage 5) diesel engine
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Exclusive MHM engine protection shutdown system
- Emergency stop button
- Central lifting eye and front & side fork pockets
- Fully bundled base (110%)
- Complete with trolley kit + folding handles

Benefits

- The Eco system reduces noise, fuel consumption and carbon emissions
- Plenty of power to meet the demands of small generator hire
- Heavy duty and proven reliability
- Power, reliability and robust strength
- Suitable to run off either diesel, HVO or a mixture of both fuels
- In the case of low fuel, low oil pressure and battery charge failure
- A must on any UK site
- Flexible and safe lifting on site
- To retain all spilt fluids
- For nice and easy manoeuvrability, transport and storage

* Eco Auto Start/Stop mode - MG 10000 SSKH-5-ECO only. Start/Stop mode works with select power tools only.

Features

- 10kVA (400V - 3ph) or 15kVA Multi-Voltage AC Aux Power (400V / 230V / 110V)*
- Linz alternator
- Kubota (Stage 3) or Yanmar (Stage 5) diesel engine
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Exclusive MHM-Gen engine protection shutdown system
- 3 way fuel valve
- 12V battery isolator switch
- Emergency stop button
- Central lifting eye and fork pockets
- Fully bundled base
- Engine oil drain pump

Benefits

- Plenty of power to meet the demands of medium to large generator hire
- Heavy duty and proven reliability
- World class performance and watercooled
- Suitable to run off either diesel, HVO or a mixture of both fuels
- In the case of low fuel, low oil pressure, high engine temp and battery charge failure
- Easy connectivity to an external fuel tank
- Reduces flat battery breakdowns
- A must on any UK site
- Flexible and safe lifting on site
- To retain all spilt fluids
- Reducing service time

*MG 15000 SSK-MV & MG 15000 SSY-5-MV only

Specification

Model	Three Phase Power (400V)		Single Phase Power				Noise Level		Engine Make	Engine Type	RPM	Cooling	Fuel Consumption @ 75% load (litres/hour)	Fuel Tank (L)	Average Runtime @ 75% Load (Hours)	CO ₂ Per Hour @ 75% Load (kg)	Starting System	Dimensions trolley kit with handles folded out (mm)**			Dry Weight (No Fuel)	Wet Weight (Fuel Full)	Socket configuration					
			230V		110V													L	W	H			3ph (400V)		1ph (230V)		1ph (110V)	
	kVA	kW	kVA	kW	kVA	kW	L	W															H	32A	16A	32A	16A	32A
MG 10000 SSK-3PH	10	8	3.3	2.6	N/A	N/A	89	64	Kubota	D722E (Stage 3)	3000	Water	2.8	40	14	7.34	Deepsea 3110 c/w Auto Start/Stop	1635	940	980	365kg	396kg	1	-	-	1	-	-
MG 10000 SSKH-5-ECO	N/A	N/A	10	8	10	8	89	64	Kohler	KDW702 (Stage 5)	3000	Water	2.8	35	12.5	7.34	Key Start	1785	1030	1050	379kg	408kg	-	-	1	1	2	1
MG 10000 SSKH-5	N/A	N/A	10	8	10	8	89	64	Kohler	KDW702 (Stage 5)	3000	Water	2.8	35	12.5	7.34	Deepsea 3110 c/w Auto Start/Stop	1785	1030	1050	379kg	408kg	-	-	1	2	2	1

** See separate data sheet for all dimensions.

Specification

Model	Three Phase Power (400V)		Single Phase Power				Noise Level		Engine Make	Engine Type	Alternator	RPM	Cooling	Fuel Consumption @ 75% load (litres/hour)	Fuel Tank (L)	Average Runtime @ 75% Load (Hours)	CO ₂ Per Hour @ 75% Load (kg)	Starting System	Dimensions - machine only (mm)**			Dry Weight (No Fuel)	Wet Weight (Fuel Full)	Socket configuration					
			230V		110V														L	W	H			3ph (400V)		1ph (230V)		1ph (110V)	
	kVA	kW	kVA	kW	kVA	kW	L	W																H	32A	16A	32A	16A	32A
MG 10000 SSKH-5-3PH	10	8	3.3	2.6	N/A	N/A	89	64	Kohler	KDW 702 (Stage 5)	Linz	3000	Water	2.8	35	12.5	7.34	Deepsea 3110 c/w Auto Start/Stop	1785	1030	1050	379kg	408kg	1	-	-	1	-	-
MG 15000 SSK-MV	15	12	15	12	12	9.6	88	63	Kubota	D1105 (Stage 3)	Linz (AVR)	3000	Water	3.7	40	10	9.69	Deepsea 3110 c/w Auto Start/Stop	1440	810	890	425kg	465kg	1	-	2	2	3	1
MG 15000 SSY-5-MV	15	12	15	12	12	9.6	88	63	Yanmar	TBA (Stage 5)	Linz (AVR)	3000	Water	3.7	40	10	9.69	Deepsea 3110 c/w Auto Start/Stop	1440	810	890	425kg	465kg	1	-	2	2	3	1

** See separate data sheet for all dimensions.



All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)

Sales leaflets containing full product specification available on request and can be found on our website.

Tel 0808 1689099 Email sales@mhm-group.co.uk
www.mhm-group.co.uk



All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.



Tel 0808 1689099 Email sales@mhm-group.co.uk
www.mhm-group.co.uk

All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.

Sales leaflets containing full product specification available on request and can be found on our website.

All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)



Ready to Rent Petrol & Diesel //

Designed in the UK
Built in Italy

Generators // Range 1.25-160kVA



When looking for robust, reliable, good quality Ready to Rent petrol or diesel generators look no further than our 1.25-160kVA generator range.

Silent, Super Silent & Extra Super Silent
Rugged & Reliable Power

Ready to Rent Petrol & Diesel //

Designed in the UK
Built in Italy

Generators // Range 1.25-160kVA



When looking for robust, reliable, good quality Ready to Rent petrol or diesel generators look no further than our 1.25-160kVA generator range.

Silent, Super Silent & Extra Super Silent
Rugged & Reliable Power

MGTP 16 SSK-MV

Ready to Rent
16kVA Diesel Generator

Stage 3A Engine **Kubota** 2 Year Engine Warranty (Limited)

MGTP 16 SSY-MV

Ready to Rent
16kVA Diesel Generator

Stage 3A Engine **YANMAR** 3 Year Engine Warranty (Limited)

MGTP 16 SSY-5-MV

Ready to Rent
16kVA Diesel Generator

Stage 5 Engine **YANMAR** 3 Year Engine Warranty (Limited)

MGTP 20 SSK-MV

Ready to Rent
20kVA Diesel Generator

Stage 3A Engine **Kubota** 2 Year Engine Warranty (Limited)

MGTP 20 SSY-MV

Ready to Rent
20kVA Diesel Generator

Stage 3A Engine **YANMAR** 3 Year Engine Warranty (Limited)

MGTP 20 SSY-5-MV

Ready to Rent
20kVA Diesel Generator

Stage 5 Engine **YANMAR** 3 Year Engine Warranty (Limited)



Optional extras: Road-tow Kit, GPS Telemetry Tracker

Optional extras: Road-tow Kit, GPS Telemetry Tracker

Optional extras: Road-tow Kit, GPS Telemetry Tracker

Optional extras: Road-tow Kit, GPS Telemetry Tracker

Optional extras: Road-tow Kit, GPS Telemetry Tracker

Optional extras: Road-tow Kit, GPS Telemetry Tracker

Features

- 16kVA Multi-Voltage AC Aux Power (400V / 230V / 110V)
- Linz alternator
- Kubota (Stage 3) or Yanmar (Stage 3 or 5) diesel engine
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Exclusive MHM-Gen engine protection shutdown system
- 3 way fuel valve
- 12V battery isolator switch
- Emergency stop button
- Variable RCD
- ELR bypass switch (activated by key only)
- Central lifting eye and fork pockets
- Fully bunded base (110%)
- Engine oil drain pump

Benefits

- Hugely versatile with a massive advantage in the rental industry
- Heavy duty and proven reliability
- World class performance and watercooled
- Suitable to run off either diesel, HVO or a mixture of both fuels
- In the case of low fuel, low oil pressure, high engine temp and battery charge failure
- Easy connectivity to an external fuel tank
- Reduces flat battery breakdowns
- A must on any UK site
- Flexible protection
- Turn off the ELR to avoid nuisance tripping when powering electrical motors
- Flexible and safe lifting on site
- To retain all spilt fluids
- Reducing service time

Features

- 20kVA Multi-Voltage AC Aux Power (400V / 230V / 110V)
- Linz alternator
- Kubota (Stage 3) or Yanmar (Stage 3 or 5) diesel engine
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Exclusive MHM-Gen engine protection shutdown system
- 3 way fuel valve
- 12V battery isolator switch
- Emergency stop button
- Variable RCD
- ELR bypass switch (activated by key only)
- Central lifting eye and fork pockets
- Fully bunded base (110%) complete with bund alarm
- Engine oil drain pump

Benefits

- Hugely versatile with a massive advantage in the rental industry
- Heavy duty and proven reliability
- World class performance and watercooled
- Suitable to run off either diesel, HVO or a mixture of both fuels
- In the case of low fuel, low oil pressure, high engine temp and battery charge failure
- Easy connectivity to an external fuel tank
- Reduces flat battery breakdowns
- A must on any UK site
- Flexible protection
- Turn off the ELR to avoid nuisance tripping when powering electrical motors
- Flexible and safe lifting on site
- To retain all spilt fluids, alert and shut down in the event of overflow
- Reducing service time

Specification

Model	Three Phase Power (400V)						Single Phase Power		Noise Level LWA dBa@7m	Engine Make	Engine Type	Alternator	RPM	Cooling	Fuel Consumption @ 75% load (litres/hour)	Fuel Tank (L)	Average Runtime @ 75% Load (Hours) CO ₂ Per Hour @ 75% Load (kg)	Starting System	Dimensions - machine only (mm)**			Dry Weight (No Fuel)	Wet Weight (Fuel Full)	Socket configuration				
	kVA	kW	kVA	kW	kVA	kW	230V	110V											L	W	H			3ph (400V)	1ph (230V)	1ph (110V)	32A	32A
	16	12.8	16	12.8	16	12.8	88	63	Kubota	V2203 (Stage 3A)	Linz (AVR Controlled)	1500	Water	4.2	120	28	11	Deepsa 3110 c/w Auto Start/ Stop	1850	970	1520	700kg	820kg	1	2	2	3	1
MGTP 16 SSK-MV	16	12.8	16	12.8	16	12.8	88	63	Kubota	V2203 (Stage 3A)	Linz (AVR Controlled)	1500	Water	4.2	120	28	11	Deepsa 3110 c/w Auto Start/ Stop	1850	970	1520	700kg	820kg	1	2	2	3	1
MGTP 16 SSY-MV	16	12.8	16	12.8	16	12.8	88	63	Yanmar	TBA (Stage 3A)	Linz (AVR Controlled)	1500	Water	4.2	120	28	11	Deepsa 3110 c/w Auto Start/ Stop	1850	970	1520	700kg	820kg	1	2	2	3	1
MGTP 16 SSY-5-MV	16	12.8	16	12.8	16	12.8	88	63	Yanmar	TBA (Stage 5)	Linz (AVR Controlled)	1500	Water	4.2	120	28	11	Deepsa 3110 c/w Auto Start/ Stop	1850	970	1520	700kg	820kg	1	2	2	3	1

** See separate data sheet for all dimensions.

Specification

Model	Three Phase Power (400V)						Single Phase Power		Noise Level LWA dBa@7m	Engine Make	Engine Type	Alternator	RPM	Cooling	Fuel Consumption @ 75% load (litres/hour)	Fuel Tank (L)	Average Runtime @ 75% Load (Hours) CO ₂ Per Hour @ 75% Load (kg)	Starting System	Dimensions - machine only (mm)**			Dry Weight (No Fuel)	Wet Weight (Fuel Full)	Socket configuration				
	kVA	kW	kVA	kW	kVA	kW	230V	110V											L	W	H			3ph (400V)	1ph (230V)	1ph (110V)	32A	32A
	20	16	20	16	20	16	88	63	Kubota	V2203 (Stage 3A)	Linz (AVR Controlled)	1500	Water <td>4.6</td> <td>120</td> <td>26</td> <td>12.05</td> <td>Deepsa 3110 c/w Auto Start/ Stop</td> <td>1850</td> <td>970</td> <td>1520</td> <td>705kg</td> <td>825kg</td> <td>1</td> <td>2</td> <td>2</td> <td>3</td> <td>1</td>	4.6	120	26	12.05	Deepsa 3110 c/w Auto Start/ Stop	1850	970	1520	705kg	825kg	1	2	2	3	1
MGTP 20 SSK-MV	20	16	20	16	20	16	88	63	Kubota	V2203 (Stage 3A)	Linz (AVR Controlled)	1500	Water	4.6	120	26	12.05	Deepsa 3110 c/w Auto Start/ Stop	1850	970	1520	705kg	825kg	1	2	2	3	1
MGTP 20 SSY-MV	20	16	20	16	20	16	88	63	Yanmar	TBA (Stage 3A)	Linz (AVR Controlled)	1500	Water	4.6	120	26	12.05	Deepsa 3110 c/w Auto Start/ Stop	1850	970	1520	705kg	825kg	1	2	2	3	1
MGTP 20 SSY-5-MV	20	16	20	16	20	16	88	63	Yanmar	TBA (Stage 5)	Linz (AVR Controlled)	1500	Water	4.6	120	26	12.05	Deepsa 3110 c/w Auto Start/ Stop	1850	970	1520	705kg	825kg	1	2	2	3	1

** See separate data sheet for all dimensions.



All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)

Sales leaflets containing full product specification available on request and can be found on our website.

Tel 0808 1689099 Email sales@mhm-group.co.uk
www.mhm-group.co.uk



All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.



Tel 0808 1689099 Email sales@mhm-group.co.uk
www.mhm-group.co.uk

All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.

Sales leaflets containing full product specification available on request and can be found on our website.

All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)



Ready to Rent Petrol & Diesel //

Designed in the UK
Built in Italy

Generators // Range 1.25–160kVA



When looking for robust, reliable, good quality Ready to Rent petrol or diesel generators look no further than our 1.25–160kVA generator range.

Silent, Super Silent & Extra Super Silent
Rugged & Reliable Power

Ready to Rent Petrol & Diesel //

Designed in the UK
Built in Italy

Generators // Range 1.25–160kVA



When looking for robust, reliable, good quality Ready to Rent petrol or diesel generators look no further than our 1.25–160kVA generator range.

Silent, Super Silent & Extra Super Silent
Rugged & Reliable Power

MGTP 25 SSK-MV

Ready to Rent
25kVA Diesel Generator

Stage 3A Engine **Kubota** 2 Year Engine Warranty (Limited)

MGTP 25 SSY-MV

Ready to Rent
25kVA Diesel Generator

Stage 3A Engine **YANMAR** 3 Year Engine Warranty (Limited)

MGTP 25 SSY-5-MV

Ready to Rent
25kVA Diesel Generator

Stage 5 Engine **YANMAR** 3 Year Engine Warranty (Limited)

MGTP 33 SSF

Ready to Rent
33kVA Diesel Generator

Stage 3A Engine **IVECO** 1 Year Engine Warranty (Limited)

MGTP 45 SSF

Ready to Rent
45kVA Diesel Generator

Stage 3A Engine **IVECO** 1 Year Engine Warranty (Limited)

MGTP 60 SSF

Ready to Rent
60kVA Diesel Generator

Stage 3A Engine **IVECO** 1 Year Engine Warranty (Limited)



Optional extras: Road-tow Kit, GPS Telemetry Tracker

Optional extras: Road-tow Kit, GPS Telemetry Tracker

Optional extras: Road-tow Kit, GPS Telemetry Tracker

Optional extras: Road-tow Kit, GPS Telemetry Tracker

Optional extras: Road-tow Kit, GPS Telemetry Tracker

Optional extras: Road-tow Kit, GPS Telemetry Tracker

Features

- 25kVA Multi-Voltage AC Aux Power (400V / 230V / 110V)
- Linz alternator
- Kubota (Stage 3) or Yanmar (Stage 3 or 5) diesel engine
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Exclusive MHM-Gen engine protection shutdown system
- 3 way fuel valve
- 12V battery isolator switch
- Emergency stop button
- Variable RCD
- ELR bypass switch (activated by key only)
- Central lifting eye and fork pockets
- Fully bunded base (110%) complete with bund alarm
- Engine oil drain pump

Benefits

- Hugely versatile with a massive advantage in the rental industry
- Heavy duty and proven reliability
- World class performance and watercooled
- Suitable to run off either diesel, HVO or a mixture of both fuels
- In the case of low fuel, low oil pressure, high engine temp and battery charge failure
- Easy connectivity to an external fuel tank
- Reduces flat battery breakdowns
- A must on any UK site
- Flexible protection
- Turn off the ELR to avoid nuisance tripping when powering electrical motors
- Flexible and safe lifting on site
- To retain all spilt fluids, alert and shut down in the event of overflow
- Reducing service time

Features

- 33–60kVA 3ph AC Aux Power (400V)
- Linz alternator
- FPT (Iveco) diesel engine (Stage 3A)
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Exclusive MHM-Gen engine protection shutdown system
- 3 way fuel valve
- 12V battery isolator switch
- Emergency stop button
- Variable RCD
- ELR bypass switch (activated by key only)
- Central lifting eye and fork pockets
- Fully bunded base (110%) complete with bund alarm
- Engine oil drain pump

Benefits

- Hugely versatile with a massive advantage in the rental industry
- Heavy duty and proven reliability
- World class performance and watercooled
- Suitable to run off either diesel, HVO or a mixture of both fuels
- In the case of low fuel, low oil pressure, high engine temp and battery charge failure
- Easy connectivity to an external fuel tank
- Reduces flat battery breakdowns
- A must on any UK site
- Flexible protection
- Turn off the ELR to avoid nuisance tripping when powering electrical motors
- Flexible and safe lifting on site
- To retain all spilt fluids, alert and shut down in the event of overflow
- Reducing service time

Specification

Model	Three Phase Power (400V)						Single Phase Power		Noise Level LWA dBa@7m	Engine Make	Engine Type	Alternator	RPM	Cooling	Fuel Consumption @ 75% load (litres/hour)	Fuel Tank (L)	Average Runtime @ 75% Load (Hours) CO ₂ Per Hour (kg)	Starting System	Dimensions – machine only (mm)**			Socket configuration						
	230V		110V		L	W	H	3ph (400V)											1ph (230V)									
	kVA	kW	kVA	kW				kVA	kW	32A	32A	16A	32A	16A														
MGTP 25 SSK-MV	25	20	25	20	25	20	88	63	Kubota	V2203 (Stage 3A)	Linz (AVR Controlled)	1500	Water	5	120	24	13.1	Deepsea 3110 c/w Auto Start/ Stop	1850	970	1520	710kg	830kg	1	2	2	3	1
MGTP 25 SSY-MV	25	20	25	20	25	20	88	63	Yanmar	TBA (Stage 3A)	Linz (AVR Controlled)	1500	Water	5	120	24	13.1	Deepsea 3110 c/w Auto Start/ Stop	1850	970	1520	710kg	830kg	1	2	2	3	1
MGTP 25 SSY-5-MV	25	20	25	20	25	20	88	63	Yanmar	TBA (Stage 5)	Linz (AVR Controlled)	1500	Water	5	120	24	13.1	Deepsea 3110 c/w Auto Start/ Stop	1850	970	1520	710kg	830kg	1	2	2	3	1

** See separate data sheet for all dimensions.

Specification

Model	Three Phase Power (400V)						Single Phase Power		Noise Level LWA dBa@7m	Engine Make	Engine Type	Alternator	RPM	Cooling	Fuel Consumption @ 75% load (litres/hour)	Fuel Tank (L)	Average Runtime @ 75% Load (Hours) CO ₂ Per Hour (kg)	Starting System	Dimensions – machine only (mm)**			Socket configuration						
	230V		110V		L	W	H	3ph (400V)											1ph (230V)									
	kVA	kW	kVA	kW				kVA	kW	125A	63A	32A	32A	16A														
MGTP 33 SSF	33	26.4	11	8.8	N/A	N/A	88	63	Iveco	FPT F325M1F (Stage 3A)	Linz (AVR Controlled)	1500	Water	6.5	120	18	17.03	Deepsea 7310 c/w Auto Start/ Stop	2025	950	1620	950kg	1070kg	–	1	1	3	2
MGTP 45 SSF	45	36	15	12	N/A	N/A	88	63	Iveco	N45 SMT1F (Stage 3A)	Linz (AVR Controlled)	1500	Water	9	250	31	23.58	Deepsea 7310 c/w Auto Start/ Stop	2160	1070	1760	1385kg	1685kg	–	1	1	4	2
MGTP 60 SSF	60	48	20	16	N/A	N/A	88	63	Iveco	N45 SMT1F (Stage 3A)	Linz (AVR Controlled)	1500	Water	12	250	21	31.44	Deepsea 7310 c/w Auto Start/ Stop	2160	1070	1760	1450kg	1750kg	1	1	1	4	2

** See separate data sheet for all dimensions.



All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)

Sales leaflets containing full product specification available on request and can be found on our website.

Tel 0808 1689099 Email sales@mhm-group.co.uk
www.mhm-group.co.uk



All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.



Tel 0808 1689099 Email sales@mhm-group.co.uk
www.mhm-group.co.uk

All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.

Sales leaflets containing full product specification available on request and can be found on our website.

All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)



Ready to Rent Petrol & Diesel //

Designed in the UK
Built in Italy

Generators // Range 1.25–160kVA



When looking for robust, reliable, good quality Ready to Rent petrol or diesel generators look no further than our 1.25–160kVA generator range.

Silent, Super Silent & Extra Super Silent
Rugged & Reliable Power

Ultra Silenced Event Ready Diesel //

Designed in the UK
Built in Italy

Generators // Range 20–100kVA



When looking for robust, reliable, good quality 20kVA Power Solution, our Ultra Silenced Event Ready diesel generators have everything the event market requires.

Ultra Silenced
Rugged & Reliable Power

MGTP 80 SSF

Ready to Rent
80kVA Diesel Generator

Stage 3A Engine **IVECO** 1 Year Engine Warranty (Limited)



Optional extras: Road-tow Kit, GPS Telemetry Tracker

MGTP 100 SSF

Ready to Rent
100kVA Diesel Generator

Stage 3A Engine **IVECO** 1 Year Engine Warranty (Limited)



Optional extras: Road-tow Kit, GPS Telemetry Tracker

MGTP 160 SSF

Ready to Rent
160kVA Diesel Generator

Stage 3A Engine **IVECO** 1 Year Engine Warranty (Limited)



Optional extras: GPS Telemetry Tracker

MGTP 20 USK

Ultra Silenced Event Ready
20kVA Diesel Generator

Stage 3 Engine **Kubota** 2 Year Engine Warranty (Limited)



Optional extras: Road-tow Kit, GPS Telemetry Tracker, Bund Alarm

MGTP 20 USY

Ultra Silenced Event Ready
20kVA Diesel Generator

Stage 3 Engine **YANMAR** 3 Year Engine Warranty (Limited)



Optional extras: Road-tow Kit, GPS Telemetry Tracker, Bund Alarm

MGTP 20 USY-5

Ultra Silenced Event Ready
20kVA Diesel Generator

Stage 5 Engine **YANMAR** 3 Year Engine Warranty (Limited)



Optional extras: Road-tow Kit, GPS Telemetry Tracker, Bund Alarm

Features

- 80–160kVA 3ph AC Aux Power (400V)
- Linz alternator
- FPT (Iveco) diesel engine (Stage 3A)
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Exclusive MHM-Gen engine protection shutdown system
- 3 way fuel valve
- 12V battery isolator switch
- Emergency stop button
- Variable RCD
- ELR bypass switch (activated by key only)
- Central lifting eye and fork pockets
- Fully bundled base
- Engine oil drain pump

Benefits

- Hugely versatile with a massive advantage in the rental industry
- Heavy duty and proven reliability
- World class performance and watercooled
- Suitable to run off either diesel, HVO or a mixture of both fuels
- In the case of low fuel, low oil pressure, high engine temp and battery charge failure
- Easy connectivity to an external fuel tank
- Reduces flat battery breakdowns
- A must on any UK site
- Flexible protection
- Turn off the ELR to avoid nuisance tripping when powering electrical motors
- Flexible and safe lifting on site
- To retain all spilt fluids
- Reducing service time

Features

- 20kVA 3ph (400V) Aux Power
- Linz alternator
- Yanmar (Stage 3A or Stage 5) or Kubota (Stage 3A) diesel engines
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Exclusive MHM-Gen engine protection shutdown system
- 3 way fuel valve
- 12V battery isolator switch
- Emergency stop button
- Fully bundled base (110%) complete with bund alarm
- Engine oil drain pump

Benefits

- Plenty of power to meet the demands of small to medium event hire
- Heavy duty and proven reliability
- World class performance and watercooled
- Suitable to run off either diesel, HVO or a mixture of both fuels
- In the case of low fuel, low oil pressure, high engine temp and battery charge failure
- Easy connectivity to an external fuel tank
- Reduces flat battery breakdowns
- A must on any UK site
- To retain all spilt fluids, alert and shut down in the event of overflow
- Reducing service time

Specification

Model	Three Phase Power (400V)				Single Phase Power				Noise Level LWA dBa@7m	Engine Make	Engine Type	Alternator	RPM	Cooling	Fuel Consumption @ 75% Load (Litres/hour)	Fuel Tank (L)	Average Runtime @ 75% Load (Hours)	CO ₂ Per Hour @ 75% Load (kg)	Starting System	Dimensions – machine only (mm)**			Socket configuration					
	kVA	kW	230V		110V		L	W												H	3ph (400V)			1ph (230V)				
			kVA	kW	kVA	kW															125A	63A	32A	32A	16A			
MGTP 80 SSF	80	64	26.6	21.3	N/A	N/A	88	63	Iveco	N45 TEIF (Stage 3A)	Linz (AVR Controlled)	1500	Water	15.5	250	16	40.61	Deepsea 7310 c/w Auto Start/ Stop	2600	1180	1740	1630kg	1880kg	1	1	1	4	2
MGTP 100 SSF	100	80	33	26.4	N/A	N/A	88	63	Iveco	N45 TEZF (Stage 3A)	Linz (AVR Controlled)	1500	Water	18.7	250	13	48.99	Deepsea 7310 c/w Auto Start/ Stop	2600	1180	1740	1690kg	1940kg	1	1	1	4	2
MGTP 160 SSF	154	123	53	42	N/A	N/A	88	63	Iveco	NEF67TE1PV (Stage 3A)	Linz (AVR Controlled)	1500	Water	27.5	450	17	72.05	Deepsea 7310 c/w Auto Start/ Stop	3270	1350	1945	2400kg	2850kg	1	1	1	4	2

** See separate data sheet for all dimensions.

Model	Three Phase Power (400V)				Single Phase Power				Noise Level LWA dBa@7m	Engine Make	Engine Type	Alternator	RPM	Cooling	Fuel Consumption @ 75% Load (Litres/hour)	Fuel Tank (L)	Average Runtime @ 75% Load (Hours)	CO ₂ Per Hour @ 75% Load (kg)	Starting System	Dimensions – machine only (mm)**			Socket configuration					Hard wire facility	
	kVA	kW	230V		110V		L	W												H	3ph (400V)			1ph (230V)		3ph (400V)	1ph (230V)		
			kVA	kW	kVA	kW															32A	32A	16A						
MGTP 20 USK	20	16	6.6	5.3	80	50	Kubota	V2203 (Stage 3)	Linz	1500	Water	4.6	300	65	12.05	Deepsea 3110 c/w Auto Start/ Stop	2300	850	1600	1250kg	1550kg	1	2	2	✓	✓			
MGTP 20 USY	20	16	6.6	5.3	80	50	Yanmar	TBA (Stage 3)	Linz	1500	Water	4.6	300	65	12.05	Deepsea 3110 c/w Auto Start/ Stop	2300	850	1600	1250kg	1550kg	1	2	2	✓	✓			
MGTP 20 USY-5	20	16	6.6	5.3	80	50	Yanmar	TBA (Stage 5)	Linz	1500	Water	4.6	300	65	12.05	Deepsea 3110 c/w Auto Start/ Stop	2300	850	1600	1250kg	1550kg	1	2	2	✓	✓			

** See separate data sheet for all dimensions.

Specification



All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)

Sales leaflets containing full product specification available on request and can be found on our website.

Tel 0808 1689099 Email sales@mhm-group.co.uk
www.mhm-group.co.uk



All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.



Tel 0808 1689099 Email sales@mhm-group.co.uk
www.mhm-group.co.uk

All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.

Sales leaflets containing full product specification available on request and can be found on our website.

All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)



Ultra Silenced Event Ready Diesel // Generators // Range 20-100kVA

Designed in the UK
Built in Italy



When looking for robust, reliable, good quality 35 or 45kVA Power Solution, our Ultra Silenced Event Ready diesel generators have everything the event market requires.

Ultra Silenced
Rugged & Reliable Power

Ultra Silenced Event Ready Diesel // Generators // Range 20-100kVA

Designed in the UK
Built in Italy



When looking for robust, reliable, good quality 60kVA Power Solution, our Ultra Silenced Event Ready diesel generators have everything the event market requires.

Ultra Silenced
Rugged & Reliable Power

MGTP 35 USKH-5 Ultra Silenced Event Ready 35kVA Diesel Generator

Stage 5 Engine

KOHLER 2 Year Engine Warranty (Limited)

MGTP 45 USKH-5 Ultra Silenced Event Ready 45kVA Diesel Generator

Stage 5 Engine

KOHLER 2 Year Engine Warranty (Limited)

MGTP 60 USKH-5 Ultra Silenced Event Ready 60kVA Diesel Generator

Stage 5 Engine

KOHLER 2 Year Engine Warranty (Limited)

MGTP 100 USKH-5 Ultra Silenced Event Ready 100kVA Diesel Generator

Stage 5 Engine

KOHLER 2 Year Engine Warranty (Limited)



Features

- 35-45kVA 3ph (400V)
- Linz alternator
- Kohler diesel engine (Stage 5)
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Exclusive MHM-Gen engine protection shutdown system
- 3 way fuel valve
- 12V battery isolator switch
- Emergency stop button
- Central lifting eye and fork pockets
- Variable RCD
- ELR bypass switch (activated by key only)
- Fully bundled base (110%) complete with bund alarm
- Engine oil drain pump

Benefits

- Plenty of power to meet the demands of small to medium event hire
- Heavy duty and proven reliability
- World class performance and watercooled
- Suitable to run off either diesel, HVO or a mixture of both fuels
- In the case of low fuel, low oil pressure, high engine temp and battery charge failure
- Easy connectivity to an external fuel tank
- Reduces flat battery breakdowns
- A must on any UK site
- Flexible and safe lifting on site
- Flexible protection
- Turn off ELR to avoid nuisance tripping when powering electrical motor, or other similar equipment
- To retain all spilt fluids, alert and shut down in the event of overflow
- Reducing service time

Features

- 60-100kVA 3ph (400V)
- Linz alternator
- Kohler diesel engine (Stage 5)
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Exclusive MHM-Gen engine protection shutdown system
- 3 way fuel valve
- 12V battery isolator switch
- Emergency stop button
- Central lifting eye and fork pockets
- Variable RCD
- ELR bypass switch (activated by key only)
- Fully bundled base (110%) complete with bund alarm
- Engine oil drain pump

Benefits

- Plenty of power to meet the demands of small to medium event hire
- Heavy duty and proven reliability
- World class performance and watercooled
- Suitable to run off either diesel, HVO or a mixture of both fuels
- In the case of low fuel, low oil pressure, high engine temp and battery charge failure
- Easy connectivity to an external fuel tank
- Reduces flat battery breakdowns
- A must on any UK site
- Flexible and safe lifting on site
- Flexible protection
- Turn off ELR to avoid nuisance tripping when powering electrical motor, or other similar equipment
- To retain all spilt fluids, alert and shut down in the event of overflow
- Reducing service time

Specification

Model	Three Phase Power (400V)		Single Phase Power		Noise Level		Engine Make	Engine Type	Alternator	RPM	Cooling	Fuel Consumption @ 75% Load (Litres/hour)	Fuel Tank (L)	Average Runtime @ 75% Load (Hours)	CO ₂ Per Hour @ 75% Load (kg)	Starting System	Dimensions - machine only (mm)**			Dry Weight (No Fuel)	Wet Weight (Fuel Full)	Socket configuration				Hard wire facility	
	kVA	kW	230V		LWA	dBA@7m											L	W	H			3ph (400V)	1ph (230V)	3ph (400V)	1ph (230V)	3ph (400V)	1ph (230V)
			kVA	kW																							
MGTP 35 USKH-5	35	28	11.6	9.2	80	55	Kohler	KDI1903TCR CAC (Stage 5)	Linz	1500	Water	7.1	240	34	18.6	Deepsea 7310 c/w Auto Start/ Stop	2300	980	1450	1530 kg	1725 kg	1	1	3	2	✓	✓
MGTP 45 USKH-5	45	36	15	12	80	55	Kohler	KDI2504TCR CAC (Stage 5)	Linz	1500	Water	8.3	240	29	21.7	Deepsea 7310 c/w Auto Start/ Stop	2300	980	1450	1600 kg	1795 kg	1	1	4	2	✓	✓

** See separate data sheet for all dimensions.

Specification

Model	Three Phase Power (400V)		Single Phase Power		Noise Level		Engine Make	Engine Type	Alternator	RPM	Cooling	Addblue tank capacity (L)	Fuel Consumption @ 75% Load (Litres/hour)	Fuel Tank (L)	Average Runtime @ 75% Load (Hours)	CO ₂ Per Hour @ 75% Load (kg)	Starting System	Dimensions - machine only (mm)**			Dry Weight (No Fuel)	Wet Weight (Fuel Full)	Socket configuration				Hard wire facility		
	kVA	kW	230V		LWA	dBA@7m												L	W	H			3ph (400V)	1ph (230V)	3ph (400V)	1ph (230V)	3ph (400V)	1ph (230V)	
			kVA	kW																									125A
MGTP 60 USKH-5	60	48	20	16	80	55	Kohler	KDI3404TCR CAC (Stage 5)	Linz	1500	Water	-	11.4	300	26	29.8	Deepsea 7310 c/w Auto Start/ Stop	2600	1130	1800	1900 kg	2145 kg	1	1	1	4	2	✓	✓
MGTP 100 USKH-5	100	80	33	26	80	55	Kohler	KDI3404TCR SCR (Stage 5)	Linz	1500	Water	16	18.8	300	16	49.3	Deepsea 7310 c/w Auto Start/ Stop	2600	1130	1800	2080 kg	2325 kg	1	1	1	4	2	✓	✓

** See separate data sheet for all dimensions.



All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)

Sales leaflets containing full product specification available on request and can be found on our website.

Tel 0808 1689099 Email sales@mhm-group.co.uk www.mhm-group.co.uk



All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.




Tel 0808 1689099 Email sales@mhm-group.co.uk www.mhm-group.co.uk

All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.

Sales leaflets containing full product specification available on request and can be found on our website.

All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)






Welfare Cabin Ready Diesel // Generators // Range 4-25kVA

Designed in the UK
Built in Italy



When looking for robust, reliable, good quality Welfare Cabin Ready diesel generators look no further than our 4-25kVA welfare generator range.

Extra Super Silent
Rugged & Reliable Power



Welfare Cabin Ready Diesel // Generators // Range 4-25kVA

Designed in the UK
Built in Italy



When looking for robust, reliable, good quality Welfare Cabin Ready diesel generators look no further than our 4-25kVA welfare generator range.

Extra Super Silent & Extremely Compact
Rugged & Reliable Power

MG 4000-5 (Welfare)
Welfare Cabin Ready 4kVA Diesel Gen

Stage 5 Engine **KOHLER** LOMBARDINI 2 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker



MG 6000 SSK (Welfare)
Welfare Cabin Ready 6kVA Diesel Gen

Stage 3 Engine **Kubota** 2 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker



MG 6000-5 (Welfare-Basic)
Welfare Cabin Ready 6kVA Diesel Gen

Stage 5 Engine **YANMAR** 3 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker



MG 6000-5 (Welfare)
Welfare Cabin Ready 6kVA Diesel Gen

Stage 5 Engine **YANMAR** 3 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker



MG 8000 SSK (Welfare)
Welfare Cabin Ready 8kVA Diesel Gen

Stage 3 Engine **Kubota** 2 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker



MG 10000 SSK (Welfare)
Welfare Cabin Ready 9.8kVA Diesel Gen

Stage 3 Engine **Kubota** 2 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker



Features

- 4-6kVA (230V only)
- Linz alternator
- Kohler/ Lombardini electric start diesel engine 3000rpm (Stage 5) or Yanmar or Kubota diesel engine 3000rpm (Stage 3)
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Emergency stop button
- Central lifting eye and fork pockets*
- Exclusive MHM-Gen engine protection shutdown system*
- Welfare cabin ready

Benefits

- Plenty of power for most welfare cabin applications
- Heavy duty and proven reliability
- Power, reliability and robust strength / World class performance and watercooled
- Suitable to run off either diesel, HVO or a mixture of both fuels
- A must on any UK site
- Flexible and safe lifting on site
- In the case of low fuel, low oil pressure, and battery charge failure
- Easy fit, plug and play cabin installation

Features

- 6-9.8kVA (230V only)
- Mecc Alte or Linz alternator
- Yanmar electric start diesel engine 3000rpm (Stage 5) or Kubota diesel engine 3000rpm (Stage 3)
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Emergency stop button
- Central lifting eye (and fork pocket*)
- Exclusive MHM-Gen engine protection shutdown system
- Welfare cabin ready
- Large side door¹

Benefits

- Plenty of power for most welfare cabin applications
- Heavy duty and proven reliability
- World class performance and watercooled
- Suitable to run off either diesel, HVO or a mixture of both fuels
- A must on any UK site
- Flexible and safe lifting on site
- In the case of low fuel, low oil pressure, and battery charge failure
- Easy fit, plug and play cabin installation
- Quick, easy access for servicing

* MG 6000 SSK (Welfare) and MG 6000-5 (Welfare-Basic) only

* MG 8000 SSK (Welfare) and 10000 SSK (Welfare) only
† MG 6000-5 (Welfare) only

Specification

Model	Single Phase Power (230V)		Noise Level		Alternator	Engine Make	Engine Type	RPM	Cooling	Fuel Tank (L)	Average Runtime @75% Load (Hours)	CO ₂ Per Hour @75% Load (kg)	Starting System/Control Panel	Dimensions - machine only (mm)			Weights		Sockets		Hard wire facility	
	kVA	kW	LWA	dBa@7m										L	W	H	Dry (No Fuel)	Wet (Fuel Full)	32A	16A		1ph (230V)
															32A	16A	1ph (230V)					
MG 4000-5 (Welfare)	4	3.2	95	70	Linz	Kohler/ Lombardini	15LD350 (Stage 5)	3000	Air	13	13	2.62	Electric	760	475	560	71kg	84kg	-	1	-	
MG 6000 SSK (Welfare)	6	4.8	89	64	Linz	Kubota	Z482 (Stage 3)	3000	Water	40	22	4.72	Deepsea 3110 c/w two wire Auto Start/ Stop facility	1220	670	840	340kg	371kg	1	1	✓	
MG 6000-5 (Welfare-Basic)	6	4.8	92	67	Linz	Yanmar	L100 AE (Stage 5)	3000	Air	18	18	3.67	Deepsea 3110 c/w two wire Auto Start/ Stop facility	1050	590	750	182kg	203kg	1	1	✓	

Model	Single Phase Power (230V)		Noise Level		Alternator	Engine Make	Engine Type	RPM	Cooling	Fuel Tank (L)	Average Runtime @75% Load (Hours)	CO ₂ Per Hour @75% Load (kg)	Starting System/Control Panel	Dimensions - machine only (mm)			Weights		Sockets		Hard wire facility	
	kVA	kW	LWA	dBa@7m										L	W	H	Dry (No Fuel)	Wet (Fuel Full)	32A	16A		1ph (230V)
															32A	16A	1ph (230V)					
MG 6000-5 (Welfare)	6	4.8	79	54	Mecc Alte	Yanmar	L100 AE (Stage 5)	3000	Air	N/A	N/A	3.67	Deepsea 3110 c/w two wire Auto Start/ Stop facility	960	550	725	178kg	N/A	1	-	✓	
MG 8000 SSK (Welfare)	8	6.4	89	64	Linz	Kubota	D722E (Stage 3)	3000	Water	30	12.5	6.29	Deepsea 3110 c/w two wire Auto Start/ Stop facility	1220	670	840	346kg	377kg	1	2	✓	
MG 10000 SSK (Welfare)	9.8	7.8	89	64	Linz	Kubota	D722E (Stage 3)	3000	Water	40	14	7.34	Deepsea 3110 c/w two wire Auto Start/ Stop facility	1220	670	840	350kg	381kg	1	2	✓	

Specification



All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)

Sales leaflets containing full product specification available on request and can be found on our website.

Tel 0808 1689099 Email sales@mhm-group.co.uk www.mhm-group.co.uk



All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.



Tel 0808 1689099 Email sales@mhm-group.co.uk www.mhm-group.co.uk

All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.

Sales leaflets containing full product specification available on request and can be found on our website.

All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)





Welfare Cabin Ready Diesel // Generators // Range 4–25kVA

Designed in the UK
Built in Italy



When looking for robust, reliable, good quality Welfare Cabin Ready diesel generators look no further than our 4–25kVA welfare generator range.

Extra Super Silent & Extremely Compact Rugged & Reliable Power



Welfare Cabin Ready Diesel // Generators // Range 4–25kVA

Designed in the UK
Built in Italy



When looking for robust, reliable, good quality Welfare Cabin Ready diesel generators look no further than our 4–25kVA welfare generator range.

Extra Super Silent Rugged & Reliable Power

MG 10000 Cube (Welfare)
Welfare Cabin Ready 9.8kVA Diesel Gen

Stage 3 Engine **Kubota** 2 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

MGKH-5 10000 Cube (Welfare)
Welfare Cabin Ready 9.8kVA Diesel Gen

Stage 5 Engine **KOHLER** 2 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

MG 10000 Cube (Welfare-Longrun)
Welfare Cabin Ready 9.8kVA Longrun Diesel Gen

Stage 3 Engine **Kubota** 2 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

MGKH-5 10000 Cube (Welfare-Longrun)
Welfare Cabin Ready 9.8kVA Longrun Diesel Gen

Stage 5 Engine **KOHLER** 2 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

MG 9000 Compact (Welfare)
Welfare Cabin Ready 9kVA Diesel Gen

Stage 3 Engine **Kubota** 2 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

MGKH-5 9000 Compact (Welfare)
Welfare Cabin Ready 9kVA Diesel Gen

Stage 5 Engine **KOHLER** 2 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

Features

- 9.8kVA (230V only) AC Aux Power
- Mecc Alte alternator
- Kubota (Stage 3) or Kohler (Stage 5) diesel engine
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Emergency stop button
- Central lifting eye
- Exclusive MHM-Gen engine protection shutdown system
- Extremely compact
- Extra large base fuel tank*
- Welfare cabin ready

Benefits

- Plenty of power for most welfare cabin applications
- Heavy duty and proven reliability
- World class performance, 1500rpm and watercooled
- Suitable to run off either diesel, HVO or a mixture of both fuels
- A must on any UK site
- Flexible and safe lifting on site
- In the case of low fuel, low oil pressure, and battery charge failure
- Ideal when saving space is important
- To enable an extra long run time
- Easy fit, plug and play cabin installation

Features

- 9–9.8kVA (230V only) AC Aux Power
- Mecc Alte alternator
- Kubota (Stage 3) or Kohler (Stage 5) diesel engine
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Emergency stop button
- Central lifting eye
- Exclusive MHM-Gen engine protection shutdown system
- Extremely compact
- Extra large base fuel tank*
- Welfare cabin ready

Benefits

- Plenty of power for most welfare cabin applications
- Heavy duty and proven reliability
- World class performance, 1500rpm and watercooled
- Suitable to run off either diesel, HVO or a mixture of both fuels
- A must on any UK site
- Flexible and safe lifting on site
- In the case of low fuel, low oil pressure, and battery charge failure
- Ideal when saving space is important
- To enable an extra long run time
- Easy fit, plug and play cabin installation

Specification

Model	Single Phase Power (230V)		Noise Level		Alternator	Engine Make	Engine Type	RPM	Cooling	Fuel Tank (L)	Average Runtime @75 Load (Hours)	CO ₂ Per Hour @75% Load (kg)	Starting System/Control Panel	Dimensions – machine only (mm)			Weights		Sockets			Hard wire facility
	kVA	kW	LWA	dBa@7m										L	W	H	Dry (No Fuel)	Wet (Fuel Full)	32A	16A	1ph (230V)	
MG 10000 Cube (Welfare)	9.8	7.8	79	54	Mecc Alte	Kubota	D1105 (Stage 3)	1500	Water	55	29	4.98	Deepsea 3110 c/w two wire Auto Start/Stop facility	1100	790	1000	425kg	475kg	2	–	–	✓
MGKH-5 10000 Cube (Welfare)	9.8	7.8	79	54	Mecc Alte	Kohler	TBA (Stage 5)	1500	Water	55	29	4.98	Deepsea 3110 c/w two wire Auto Start/Stop facility	1100	790	1000	425kg	475kg	2	–	–	✓
MG 10000 Cube (Welfare-Longrun)	9.8	7.8	79	54	Mecc Alte	Kubota	D1105 (Stage 3)	1500	Water	300	157	4.98	Deepsea 3110 c/w two wire Auto Start/Stop facility	1115	800	1560	465kg	708kg	2	–	–	✓

Specification

Model	Single Phase Power (230V)		Noise Level		Alternator	Engine Make	Engine Type	RPM	Cooling	Fuel Tank (L)	Average Runtime @75 Load (Hours)	CO ₂ Per Hour @75% Load (kg)	Starting System/Control Panel	Dimensions – machine only (mm)			Weights		Sockets			Hard wire facility	
	kVA	kW	LWA	dBa@7m										L	W	H	Dry (No Fuel)	Wet (Fuel Full)	63A	32A	16A		1ph (230V)
MGKH-5 10000 Cube (Welfare-Longrun)	9.8	7.8	79	54	Mecc Alte	Kohler	TBA (Stage 5)	1500	Water	300	157	4.98	Deepsea 3110 c/w two wire Auto Start/Stop facility	1240	790	1410	465kg	708kg	–	2	–	–	✓
MG 9000 Compact (Welfare)	9	7.2	88	63	Mecc Alte	Kubota	D1105 (Stage 3)	1500	Water	195	102	4.98	Deepsea 3110 c/w two wire Auto Start/Stop facility	960	680	1785	478kg	648kg	1	1	1	–	✓
MGKH-5 9000 Compact (Welfare)	9	7.2	88	63	Mecc Alte	Kohler	TBA (Stage 5)	1500	Water	195	102	4.98	Deepsea 3110 c/w two wire Auto Start/Stop facility	TBA	TBA	TBA	478kg	648kg	1	1	2	–	✓



All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)

Sales leaflets containing full product specification available on request and can be found on our website.

Tel 0808 1689099 Email sales@mhm-group.co.uk www.mhm-group.co.uk



All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.



Tel 0808 1689099 Email sales@mhm-group.co.uk www.mhm-group.co.uk

All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.

Sales leaflets containing full product specification available on request and can be found on our website.

All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)





Welfare Cabin Ready Diesel // Generators // Range 4-25kVA

Designed in the UK
Built in Italy



When looking for robust, reliable, good quality Welfare Cabin Ready diesel generators look no further than our 4-25kVA welfare generator range.

Silent & Extra Super Silent
Rugged & Reliable Power



Welfare Cabin Ready Diesel // Generators // Range 4-25kVA

Designed in the UK
Built in Italy



When looking for robust, reliable, good quality Welfare Cabin Ready diesel generators look no further than our 4-25kVA welfare generator range.

Extra Super Silent & Extremely Compact
Rugged & Reliable Power

MG 12000 Compact (Welfare)

Welfare Cabin Ready 12kVA Diesel Gen

Stage 3 Engine **Kubota** 2 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

MGKH-5 12000 Compact (Welfare)

Welfare Cabin Ready 12kVA Diesel Gen

Stage 5 Engine **KOHLER** 2 Year Engine Warranty (Limited)




Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

MGKH-5 12000 Cube (Welfare)

Welfare Cabin Ready 12kVA Diesel Gen

Stage 5 Engine **KOHLER** 2 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

MG 16000 Cube (Welfare)

Welfare Cabin Ready 16kVA Diesel Gen

Stage 3 Engine **Kubota** 2 Year Engine Warranty (Limited)




Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

MGY-5 16000 Cube (Welfare)

Welfare Cabin Ready 16kVA Diesel Gen

Stage 5 Engine **YANMAR** 3 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

MG 16000 Cube (Welfare-Longrun)

Welfare Cabin Ready 16kVA Longrun Diesel Gen

Stage 3 Engine **Kubota** 2 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

Features

- 12kVA (230V only)
- Mecc Alte or Linz alternator
- Kubota (Stage 3), Kohler (Stage 5) or Kubota (Stage 5) diesel engine
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Emergency stop button
- Central lifting eye and fork pockets
- Exclusive MHM-Gen engine protection shutdown system
- Extremely compact
- Welfare cabin ready

Benefits

- Plenty of power for most welfare cabin applications
- Heavy duty and proven reliability
- World class performance, 1500rpm and watercooled
- Suitable to run off either diesel, HVO or a mixture of both fuels
- A must on any UK site
- Flexible and safe lifting on site
- In the case of low fuel, low oil pressure, and battery charge failure
- Ideal when saving space is important
- Easy fit, plug and play cabin installation

Features

- 16kVA (230V only)
- Linz alternator
- Kubota (Stage 3) or Yanmar (Stage 5) diesel engine
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Emergency stop button
- Central lifting eye and fork pockets
- Exclusive MHM-Gen engine protection shutdown system
- Extremely compact
- Extra large base fuel tank*
- Welfare cabin ready

Benefits

- Plenty of power for most welfare cabin applications
- Heavy duty and proven reliability
- World class performance, 1500rpm and watercooled
- Suitable to run off either diesel, HVO or a mixture of both fuels
- A must on any UK site
- Flexible and safe lifting on site
- In the case of low fuel, low oil pressure, and battery charge failure
- Ideal when saving space is important
- To enable an extra long run time
- Easy fit, plug and play cabin installation

*MG 16000 Cube (Welfare-Longrun) only

Specification

Model	Single Phase Power (230V)		Noise Level		Alternator	Engine Make	Engine Type	RPM	Cooling	Fuel Tank (L)	Average Runtime @75% Load (Hours)	CO ₂ Per Hour @ 75% Load (kg)	Starting System/Control Panel	Dimensions - machine only (mm)			Weights		Sockets			Hard wire facility	
	kVA	kW	LWA	dBa@7m										L	W	H	Dry (No Fuel)	Wet (Fuel Full)	63A	32A	16A		1ph (230V)
MG 12000 Compact (Welfare)	12	9.6	88	63	Mecc Alte	Kubota	D1305 (Stage 3)	1500	Water	195	67	7.54	Deepsea 3110 c/w two wire Auto Start/ Stop facility	960	680	1785	499kg	669kg	1	1	1	✓	
MGKH-5 12000 Compact (Welfare)	12	9.6	88	63	Mecc Alte	Kohler	TBA (Stage 5)	1500	Water	195	67	7.54	Deepsea 3110 c/w two wire Auto Start/ Stop facility	672	1020	1820	499kg	669kg	1	1	1	✓	
MGKH-5 12000 Cube (Welfare)	12	9.6	84	59	Linz	Kohler	V1505 (Stage 5)	1500	Water	270	93	7.54	Deepsea 3110 c/w two wire Auto Start/ Stop facility	1505	800	1450	596kg	825kg	1	-	-	✓	

Specification

Model	Single Phase Power (230V)		Noise Level		Alternator	Engine Make	Engine Type	RPM	Cooling	Fuel Tank (L)	Average Runtime @75% Load (Hours)	CO ₂ Per Hour @ 75% Load (kg)	Starting System/Control Panel	Dimensions - machine only (mm)			Weights		Sockets			Hard wire facility	
	kVA	kW	LWA	dBa@7m										L	W	H	Dry (No Fuel)	Wet (Fuel Full)	63A	32A	16A		1ph (230V)
MG 16000 Cube (Welfare)	16	12.8	87	62	Linz	Kubota	D1703 (Stage 3)	1500	Water	120	36	8.65	Deepsea 3110 c/w two wire Auto Start/ Stop facility	1500	815	1450	698kg	818kg	2	1	1	✓	
MGY-5 16000 Cube (Welfare)	16	12.8	87	62	Linz	Yanmar	TBA (Stage 5)	1500	Water	120	36	8.65	Deepsea 3110 c/w two wire Auto Start/ Stop facility	1500	815	1450	698kg	818kg	2	1	1	✓	
MG 16000 Cube (Welfare-Longrun)	16	12.8	87	62	Linz	Kubota	D1703 (Stage 3)	1500	Water	350	106	8.65	Deepsea 3110 c/w two wire Auto Start/ Stop facility	1500	815	TBA	773kg	1123kg	2	1	1	✓	



All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)

Sales leaflets containing full product specification available on request and can be found on our website.

Tel 0808 1689099 Email sales@mhm-group.co.uk www.mhm-group.co.uk



All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.



Tel 0808 1689099 Email sales@mhm-group.co.uk www.mhm-group.co.uk

All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.

Sales leaflets containing full product specification available on request and can be found on our website.

All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)





Welfare Cabin Ready Diesel // Generators // Range 4–25kVA

Designed in the UK
Built in Italy



When looking for robust, reliable, good quality Welfare Cabin Ready diesel generators look no further than our 4–25kVA welfare generator range.

Extra Super Silent & Extremely Compact Rugged & Reliable Power



Welfare Cabin Ready Diesel // Generators // Range 4–25kVA

Designed in the UK
Built in Italy



When looking for robust, reliable, good quality Welfare Cabin Ready diesel generators look no further than our 4–25kVA welfare generator range.

Extra Super Silent Rugged & Reliable Power

MGY-5 16000 Cube (Welfare-Longrun)
Welfare Cabin Ready 16kVA Longrun Diesel Gen

Stage 5 Engine **YANMAR** 3 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

- WELFARE CABIN READY
- HVO FUEL APPROVED
- Water Cooled Extra Super Silent
- 1500 rpm

MG 20000 Cube (Welfare)
Welfare Cabin Ready 20kVA Diesel Gen

Stage 3 Engine **Kubota** 2 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

- WELFARE CABIN READY
- HVO FUEL APPROVED
- Water Cooled Extra Super Silent
- 1500 rpm

MGY-5 20000 Cube (Welfare)
Welfare Cabin Ready 20kVA Diesel Gen

Stage 5 Engine **YANMAR** 3 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

- WELFARE CABIN READY
- HVO FUEL APPROVED
- Water Cooled Extra Super Silent
- 1500 rpm

MG 20000 Cube (Welfare-Longrun)
Welfare Cabin Ready 20kVA Longrun Diesel Gen

Stage 3 Engine **Kubota** 2 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

- WELFARE CABIN READY
- HVO FUEL APPROVED
- Water Cooled Extra Super Silent
- 1500 rpm

MGY-5 20000 Cube (Welfare-Longrun)
Welfare Cabin Ready 20kVA Longrun Diesel Gen

Stage 5 Engine **YANMAR** 3 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

- WELFARE CABIN READY
- HVO FUEL APPROVED
- Water Cooled Extra Super Silent
- 1500 rpm

MG 25000 Cube (Welfare)
Welfare Cabin Ready 25kVA Diesel Gen

Stage 3 Engine **Kubota** 2 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

- WELFARE CABIN READY
- HVO FUEL APPROVED
- Water Cooled Extra Super Silent
- 1500 rpm

Features

- 16–20kVA (230V only)
- Linz alternator
- Kubota (Stage 3) or Yanmar (Stage 5) diesel engine
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Emergency stop button
- Central lifting eye and fork pockets
- Exclusive MHM-Gen engine protection shutdown system
- Extremely compact
- Extra large base fuel tank*
- Welfare cabin ready

Benefits

- Plenty of power for most welfare cabin applications
- Heavy duty and proven reliability
- World class performance, 1500rpm and watercooled
- Suitable to run off either diesel, HVO or a mixture of both fuels
- A must on any UK site
- Flexible and safe lifting on site
- In the case of low fuel, low oil pressure, and battery charge failure
- Ideal when saving space is important
- To enable an extra long run time – 157 hours @ 75% load
- Easy fit, plug and play cabin installation

Features

- 20–25kVA (230V only)
- Linz alternator
- Kubota (Stage 3) or Yanmar (Stage 5) diesel engine
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Emergency stop button
- Central lifting eye and fork pockets
- Exclusive MHM-Gen engine protection shutdown system
- Extremely compact
- Extra large base fuel tank*
- Welfare cabin ready

Benefits

- Plenty of power for most welfare cabin applications
- Heavy duty and proven reliability
- World class performance, 1500rpm and watercooled
- Suitable to run off either diesel, HVO or a mixture of both fuels
- A must on any UK site
- Flexible and safe lifting on site
- In the case of low fuel, low oil pressure, and battery charge failure
- Ideal when saving space is important
- To enable an extra long run time
- Easy fit, plug and play cabin installation

Specification

Model	Single Phase Power (230V)		Noise Level		Alternator	Engine Make	Engine Type	RPM	Cooling	Fuel Tank (L)	Average Runtime @75 Load (Hours)	CO ₂ Per Hour @ 75% Load (kg)	Starting System/Control Panel	Dimensions – machine only (mm)			Weights				Sockets				Hard wire facility	
	kVA	kW	LWA	dBa@7m										L	W	H	Dry (No Fuel)	Wet (Fuel Full)	125A	63A	32A	16A	1ph (230V)			1ph (230V)
																							1	1		
MGY-5 16000 Cube (Welfare-Longrun)	16	12.8	87	62	Linz	Yanmar	TBA (Stage 5)	1500	Water	350	106	8.65	Deepsea 3110 c/w two wire Auto Start/Stop facility	1500	815	TBA	773kg	1123kg	–	2	1	1	1	✓		
MG 20000 Cube (Welfare)	20	16	88	63	Linz	Kubota	V2203 (Stage 3)	1500	Water	120	29	11.01	Deepsea 3110 c/w two wire Auto Start/Stop facility	1500	815	1450	736kg	856kg	1	1	1	1	1	✓		
MGY-5 20000 Cube (Welfare)	20	16	88	63	Linz	Yanmar	TBA (Stage 5)	1500	Water	120	29	11.01	Deepsea 3110 c/w two wire Auto Start/Stop facility	1500	815	1450	736kg	856kg	1	1	1	1	1	✓		

Model	Single Phase Power (230V)		Noise Level		Alternator	Engine Make	Engine Type	RPM	Cooling	Fuel Tank (L)	Average Runtime @75 Load (Hours)	CO ₂ Per Hour @ 75% Load (kg)	Starting System/Control Panel	Dimensions – machine only (mm)			Weights				Sockets				Hard wire facility	
	kVA	kW	LWA	dBa@7m										L	W	H	Dry (No Fuel)	Wet (Fuel Full)	125A	63A	32A	16A	1ph (230V)			1ph (230V)
																							1	1		
MG 20000 Cube (Welfare-Longrun)	20	16	88	63	Linz	Kubota	V2203 (Stage 3)	1500	Water	350	83	11.01	Deepsea 3110 c/w two wire Auto Start/Stop facility	1500	815	TBA	811kg	1161kg	1	1	1	1	1	✓		
MGY-5 20000 Cube (Welfare-Longrun)	20	16	88	63	Linz	Yanmar	TBA (Stage 5)	1500	Water	350	83	11.01	Deepsea 3110 c/w two wire Auto Start/Stop facility	1500	815	TBA	811kg	1161kg	1	1	1	1	1	✓		
MG 25000 Cube (Welfare)	25	20	88	63	Linz	Kubota	V2203-BG (Turbo) (Stage 3)	1500	Water	120	24	13.1	Deepsea 3110 c/w two wire Auto Start/Stop facility	1500	815	1450	743kg	863kg	1	1	1	1	1	✓		

Specification



All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)

Sales leaflets containing full product specification available on request and can be found on our website.

Tel 0808 1689099 Email sales@mhm-group.co.uk
www.mhm-group.co.uk

All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.



Tel 0808 1689099 Email sales@mhm-group.co.uk
www.mhm-group.co.uk

Sales leaflets containing full product specification available on request and can be found on our website.





Welfare Cabin Ready Diesel // Generators // Range 4–25kVA

Designed in the UK
Built in Italy



When looking for robust, reliable, good quality Welfare Cabin Ready diesel generators look no further than our 4–25kVA welfare generator range.

Extra Super Silent
Rugged & Reliable Power

Fusion (Tin 12) Petrol & Diesel // Generators // Range 3–10kVA



When looking for robust, reliable, good quality Fusion (Tin 12) petrol and diesel generators look no further than our 3–10kVA Fusion (Tin 12) generator range.

Silent & Super Silent
Rugged & Reliable Power

MGY-5 25000 Cube (Welfare)
Welfare Cabin Ready 25kVA Diesel Gen

Stage 5 Engine **YANMAR** 3 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

- WELFARE CABIN READY
- HVO FUEL APPROVED
- Water Cooled Extra Super Silent
- 1500 rpm

MG 25000 Cube (Welfare-Longrun)
Welfare Cabin Ready 25kVA Longrun Diesel Gen

Stage 3 Engine **Kubota** 2 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

- WELFARE CABIN READY
- HVO FUEL APPROVED
- Water Cooled Extra Super Silent
- 1500 rpm

MGY-5 25000 Cube (Welfare-Longrun)
Welfare Cabin Ready 25kVA Longrun Diesel Gen

Stage 5 Engine **YANMAR** 3 Year Engine Warranty (Limited)



Optional extras: Remote Start/Stop, Remote Start/Stop + timer control, GPS Telemetry Tracker

- WELFARE CABIN READY
- HVO FUEL APPROVED
- Water Cooled Extra Super Silent
- 1500 rpm

MG 3000 – Tin 12
3kVA Tin 12 Petrol Generator


Stage 5 Engine **POWERED BY HONDA** GX Engine 3 Year Warranty (Limited)



Optional extras: Longrun tank

MG 3500 – Tin 12
3.5kVA Tin 12 Petrol Generator

Stage 5 Engine **POWERED BY HONDA** GX Engine 3 Year Warranty (Limited)

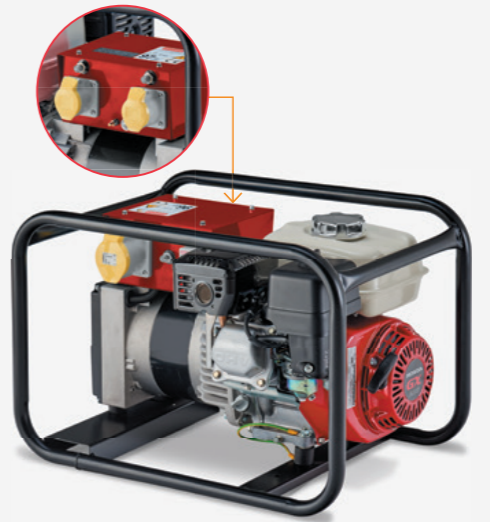

Optional extras: Longrun tank

MG 5000 – Tin 12
5kVA Tin 12 Petrol Generator

Stage 5 Engine **POWERED BY HONDA** GX Engine 3 Year Warranty (Limited)



Optional extras: Trolley kit, Longrun tank

Features

- 25kVA (230V only)
- Linz alternator
- Kubota (Stage 3) or Yanmar (Stage 5) diesel engine
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Emergency stop button
- Central lifting eye and fork pockets
- Exclusive MHM-Gen engine protection shutdown system
- Extremely compact
- Extra large base fuel tank*
- Welfare cabin ready

Benefits

- Plenty of power for most welfare cabin applications
- Heavy duty and proven reliability
- World class performance, 1500rpm and watercooled
- Suitable to run off either diesel, HVO or a mixture of both fuels
- A must on any UK site
- Flexible and safe lifting on site
- In the case of low fuel, low oil pressure, and battery charge failure
- Ideal when saving space is important
- To enable an extra long run time
- Easy fit, plug and play cabin installation

Features

- 3 - 5kVA (110V) AC Aux Power
- NSM alternator
- Honda petrol engine (Stage 5)
- Strong wrap-around frame
- All low kgs

Benefits

- Plenty of power to run small gas and water applications
- Heavy duty and proven reliability and extra smooth wave form
- Featuring low oil level shutdown
- Great protection in tough environments
- Lightweight design

*MG 25000 Cube (Welfare-Longrun) and MGY-5 25000 Cube (Welfare-Longrun) only

Specification

Model	Single Phase Power (230V)		Noise Level		Alternator	Engine Make	Engine Type	RPM	Cooling	Fuel Tank (L)	Average Runtime @75% Load (Hours)	CO ₂ Per Hour @75% Load (kg)	Starting System/Control Panel	Dimensions – machine only (mm)			Weights				Sockets				Hard wire facility		
	kVA	kW	LWA	dBA@7m										L	W	H	Dry (No Fuel)	Wet (Fuel Full)	125A	63A	32A	16A	1ph (230V)				
																							1ph (230V)	1ph (230V)		1ph (230V)	1ph (230V)
MGY-5 25000 Cube (Welfare)	25	20	88	63	Linz	Yanmar	TBA (Stage 5)	1500	Water	120	24	13.1	Deepsea 3110 c/w two wire Auto Start/ Stop facility	1500	815	1450	743kg	863kg	1	1	1	1	1	1	1	1	✓
MG 25000 Cube (Welfare-Longrun)	25	20	88	63	Linz	Kubota	V2203-BG (Turbo) (Stage 3)	1500	Water	350	70	13.1	Deepsea 3110 c/w two wire Auto Start/ Stop facility	1500	815	TBA	818kg	1168kg	1	1	1	1	1	1	1	1	✓
MGY-5 25000 Cube (Welfare-Longrun)	25	20	88	63	Linz	Yanmar	V2203-BG (Turbo) (Stage 5)	1500	Water	350	70	13.1	Deepsea 3110 c/w two wire Auto Start/ Stop facility	1500	815	TBA	818kg	1168kg	1	1	1	1	1	1	1	1	✓

Model	Single Phase Power		Noise Level		Engine Make	Engine Type	Alternator	RPM	Cooling	Fuel Consumption @75% Load (Litres/hour)	Fuel Tank (L)	Average Runtime @75% Load (Hours)	CO ₂ Per Hour @75% Load (kg)	Starting System	Dimensions (mm)						Dry Weight (No Fuel)	Wet Weight (Fuel Full)	Socket configuration		
	110V	kVA	kW	LWA											dBA@7m	Machine Only			c/w Trolley Kit				32A	16A	
																L	W	H	L	W					H
	110V	kVA	kW	LWA											dBA@7m	L	W	H	L	W			H	32A	16A
MG 3000 - Tin 12	3	2.4	95	70	Honda	GX160 (Stage 5)	NSM K100C	3000	Air	1	3.1	3.1	2.4	Recoil	610	420	415	N/A	N/A	N/A	38kg	41kg	–	2	
MG 3500 - Tin 12	3.5	2.8	96	71	Honda	GX200 (Stage 5)	NSM K100D	3000	Air	1.2	3.1	2.5	2.88	Recoil	610	420	415	N/A	N/A	N/A	39kg	42kg	1	2	
MG 5000 - Tin 12	5	4	96	71	Honda	GX270 (Stage 5)	NSM K100F	3000	Air	1.9	5.3	2.7	4.56	Recoil	690	480	540	810	4870	540	59kg	64kg	1	2	

Specification



All our diesel generators are HVO Approved (BS EN 15940:2016 Standard Only)

Sales leaflets containing full product specification available on request and can be found on our website.

Tel 0808 1689099 Email sales@mhm-group.co.uk
www.mhm-group.co.uk



All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.



Tel 0808 1689099 Email sales@mhm-group.co.uk
www.mhm-group.co.uk

All pictures are for illustration purposes only, actual machines supplied may differ in appearance and specification.

Sales leaflets containing full product specification available on request and can be found on our website.

Fusion (Tin 12) Petrol & Diesel // Generators // Range 3-10kVA



When looking for robust, reliable, good quality Fusion (Tin 12) petrol and diesel generators look no further than our 3-10kVA Fusion (Tin 12) generator range.

Silent & Super Silent
Rugged & Reliable Power

Fusion (Tin 12) Petrol & Diesel // Generators // Range 3-10kVA

Designed in the UK
Built in Italy



When looking for robust, reliable, good quality Fusion (Tin 12) petrol and diesel generators look no further than our 3-10kVA Fusion (Tin 12) generator range.

Silent & Super Silent
Rugged & Reliable Power

MG 6500 – Tin 12

6.5kVA Tin 12
Petrol Generator

Stage 5 Engine **POWERED BY HONDA** GX Engine 3 Year Warranty (Limited)



Optional extras: Trolley kit Longrun tank

MG 7500 – Tin 12

7.5kVA Tin 12
Petrol Generator

Stage 5 Engine **POWERED BY HONDA** GX Engine 3 Year Warranty (Limited)




Optional extras: Trolley kit Longrun tank

MG 10000 – Tin 12

10kVA Tin 12
Petrol Generator

Stage 5 Engine **POWERED BY HONDA** GX Engine 3 Year Warranty (Limited)

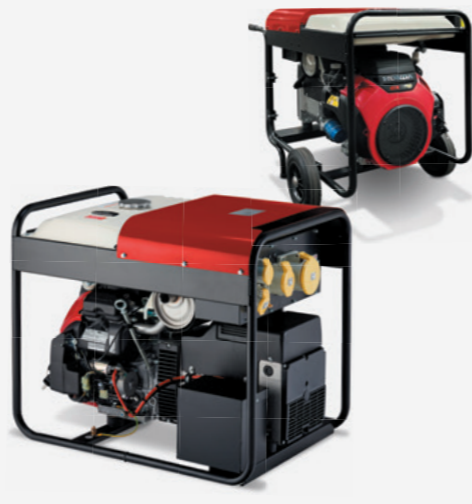

Optional extras: Trolley kit

MG 4000 SD-5 – Tin 12

4kVA Tin 12
Diesel Generator

Stage 5 Engine **KOHLER** 2 Year Engine Warranty (Limited)



Recoil start **Silenced** **HVO FUEL APPROVED**

MG 4000 SD-5/ES – Tin 12

4kVA Tin 12
Diesel Generator

Stage 5 Engine **KOHLER** 2 Year Engine Warranty (Limited)



Electric start **Silenced** **HVO FUEL APPROVED**

MG 6000 SSSY-5 – Tin 12

6kVA Tin 12
Diesel Generator

Stage 5 Engine **YANMAR** 3 Year Engine Warranty (Limited)



Super Silent **HVO FUEL APPROVED**
Optional extras: Road-tow kit GPS Telemetry Tracker

Features

- 6.5 - 10kVA (110V) AC Aux Power
- NSM alternator
- Honda petrol engine (Stage 5)
- Strong wrap-around frame
- All low kgs

Benefits

- Plenty of power to run small gas and water applications
- Heavy duty and proven reliability and extra smooth wave form
- Featuring low oil level shutdown
- Great protection in tough environments
- Lightweight design

Features

- 4 - 6kVA (110V) AC Aux Power
- Linz alternator
- Kohler/ Lombardini diesel engine (Stage 5) or Yanmar electric start diesel engine (Stage 5)*
- HVO (Hydrotreated Vegetable Oil) fuel approved
- Complete with trolley kit + folding handles
- All low kgs
- Complete with electric starting system†
- Exclusive MHM engine protection shutdown system*
- Emergency stop button*
- Central lifting eye and front & side fork pockets*
- Fully bundled base (110%)*

Benefits

- Plenty of power to run small gas and water applications
- Heavy duty and proven reliability
- Electric start, power, reliability and robust strength
- Suitable to run off either diesel, HVO or a mixture of both fuels
- For nice and easy manoeuvrability and storage
- Lightweight design
- Effort-free start up
- In the case of low fuel, low oil pressure and battery charge failure
- A must on any UK site
- Flexible and safe lifting on site
- To retain all spilt fluids

Specification

Model	Single Phase Power		Noise Level	Engine Make	Engine Type	Alternator	RPM	Cooling	Fuel Consumption @75% Load (Litres/hour)	Fuel Tank (L)	Average Runtime @75% Load (hours)	CO ₂ Per Hour @ 75% Load (kg)	Starting System	Dimensions (mm)						Dry Weight (No Fuel)	Wet Weight (Fuel Full)	Socket configuration			
	kVA	kW												LWA	L	W	H	Machine Only				c/w Trolley Kit			1ph (110V)
			L	W	H	L	W	H	63A	32A	16A														
MG 6500 - Tin 12	6.5	5.2	96	71	Honda	GX390 (Stage 5)	NSM C100SG	3000	Air	2.7	6.1	2.2	6.48	Recoil	690	480	540	TBA	TBA	TBA	70kg	76kg	-	1	2
MG 7500 - Tin 12	7.5	6	97	72	Honda	GX390 (Stage 5)	NSM S20W-110	3000	Air	2.7	6.1	2.2	6.48	Recoil	TBA	TBA	TBA	810	630	730	78kg	84kg	-	1	2
MG 10000 - Tin 12	10	8	100	75	Honda	GX630 (Stage 5)	NSM C112SB	3000	Air	3.2	18	5.5	7.68	Electric	840	575	620	TBA	TBA	TBA	115kg	133kg	1	1	2

* MG 6000 SSSY-5 – Tin 12 only
† MG 4000 SD-5/ES – Tin 12 and MG 6000 SSSY-5 – Tin 12 only

Model	Single Phase Power		Noise Level	Engine Make	Engine Type	Alternator	RPM	Cooling	Fuel Consumption @75% Load (Litres/hour)	Fuel Tank (L)	Average Runtime @75% Load (hours)	CO ₂ Per Hour @ 75% Load (kg)	Starting System	Dimensions (mm)			Dry Weight (No Fuel)	Wet Weight (Fuel Full)	Socket configuration		
	kVA	kW												LWA	L	W			H	c/w Trolley Kit, Handles Folded Out	
			L	W	H	L	W	H	32A	16A											
MG 4000 SD-5 – Tin 12	4	3.2	95	70	Kohler/ Lombardini	15LD350 (Stage 5)	Linz	3000	Air	1	13	13	2.62	Recoil	1460	750	725	89kg	102kg	1	2
MG 4000 SD-5/ES – Tin 12	4	3.2	95	70	Kohler/ Lombardini	15LD350 (Stage 5)	Linz	3000	Air	1	13	13	2.62	Electric	1460	750	725	96kg	109kg	1	2
MG 6000 SSSY-5 – Tin 12	6	4.8	90	65	Yanmar	L100AE (Stage 5)	Linz	3000	Air	1.4	25	18	3.67	Deepsea 3110 c/w Auto Start/Stop	1570	760	980	207kg	228kg	1	2

Specification



Generators // Range 3-5kVA



When looking for a robust, reliable, good quality Railtrack approved petrol or diesel generator look no further than our 3-10kVA trackside generator range.

Standard & Silent
Rugged & Reliable Power

Generators // Range 3-5kVA



When looking for a robust, reliable, good quality Railtrack approved petrol or diesel generator look no further than our 3-10kVA trackside generator range.

Standard & Silent
Rugged & Reliable Power

MG 3000 RT
Railtrack Approved
3kVA Petrol Generator
Stage 5 Engine
POWERED BY HONDA GX Engine 3 Year Warranty (Limited)

MG 3500 RT
Railtrack Approved
3.5kVA Petrol Generator
Stage 5 Engine
POWERED BY HONDA GX Engine 3 Year Warranty (Limited)

MG 5000 RT
Railtrack Approved
5kVA Petrol Generator
Stage 5 Engine
POWERED BY HONDA GX Engine 3 Year Warranty (Limited)



MG 3000 SD-5-RT
Railtrack Approved 3kVA Diesel Generator
Stage 5 Engine
KOHLER 2 Year Engine Warranty (Limited)

MG 3000 SD-5/ES-RT
Railtrack Approved 3kVA Diesel Generator
Stage 5 Engine
KOHLER 2 Year Engine Warranty (Limited)



Silenced

HVO FUEL APPROVED

Recoil start

Silenced

HVO FUEL APPROVED

Electric start

MG 4000 SD-5-RT
Railtrack Approved 4kVA Diesel Generator
Stage 5 Engine
KOHLER 2 Year Engine Warranty (Limited)

MG 4000 SD-5/ES-RT
Railtrack Approved 4kVA Diesel Generator
Stage 5 Engine
KOHLER 2 Year Engine Warranty (Limited)



Silenced

HVO FUEL APPROVED

Recoil start

Silenced

HVO FUEL APPROVED

Electric start

Features

- Railtrack approved
- 3 - 5kVA (110V) CTE (55V-0-55V)
- NSM alternator
- Honda petrol engine (Stage 5)
- Special stackable-friendly frame
- Strong wrap-around frame
- All low kgs
- Extra large fuel tank

Benefits

- Trackside ready
- Plenty of power to run a variety of tools on site
- Heavy duty and proven reliability
- Featuring low oil level shutdown
- Simple and easy transport & storage
- Great protection in a rail environment
- Lightweight design
- Extra long run time

Features

- Railtrack Approved
- (110V only) CTE (55V-0-55V)
- Linz alternator
- Kohler/ Lombardini diesel engine (Stage 5)
- All low kgs
- Complete with electric starting system*

Benefits

- Trackside Ready
- Plenty of power to meet the demands of small generator hire
- Heavy duty and proven reliability
- Power, reliability and robust strength
- Extremely light weight
- Effort-free start up

Model	Single Phase Power		Noise Level	Engine Make	Engine Type	Alternator	RPM	Cooling	Fuel Consumption @ 75% Load (Litres/hour)	Fuel Tank (L)	Average Runtime @ 75% Load (Hours)	CO ₂ Per Hour @ 75% Load (kg)	Starting System	Dimensions (mm)**						Socket configuration				
	kVA	kW												LWA	L	W	H	L	W	H	Dry Weight (No Fuel)	Wet Weight (Fuel Full)	1ph (110V)	
			32A	16A																				
MG 3000 RT	3	2.4	95	70	Honda	GX160 (Stage 5)	NSM K100C	3000	Air	1	11	11	2.4	Recoil	610	420	540	N/A	N/A	N/A	46kg	57kg	-	2
MG 3500 RT	3.5	2.8	96	71	Honda	GX200 (Stage 5)	NSM K100D	3000	Air	1.2	11	9.1	2.88	Recoil	610	420	540	N/A	N/A	N/A	47kg	58kg	1	2
MG 5000 RT	5	4	97	72	Honda	GX270 (Stage 5)	NSM K100F	3000	Air	1.9	15.5	8	4.56	Recoil	710	510	600	TBA	TBA	TBA	72kg	87kg	1	2

** See separate data sheet for all dimensions.

** See separate data sheet for all dimensions.

Model	Single Phase Power		Noise Level	Engine Make	Engine Type	RPM	Cooling	Fuel Consumption @ 75% Load (Litres/hour)	Fuel Tank (L)	Average Runtime @ 75% Load (Hours)	CO ₂ Per Hour @ 75% Load (kg)	Starting System	Dimensions (mm)**			Dry Weight (No Fuel)	Wet Weight (Fuel Full)	Socket configuration		
	kVA	kW											LWA	L	W			H	L	W
			32A	16A																
MG 3000 SD-5-RT	3	2.4	95	70	Kohler/ Lombardini	15LD350 (Stage 5)	3000	Air	0.7	13	17	1.83	Recoil	1460	750	725	75kg	88kg	1	1
MG 3000 SD-5/ES-RT	3	2.4	95	70	Kohler/ Lombardini	15LD350 (Stage 5)	3000	Air	0.7	13	17	1.83	Electric	1460	750	725	83kg	96kg	1	1
MG 4000 SD-5-RT	4	3.2	95	70	Kohler/ Lombardini	15LD350 (Stage 5)	3000	Air	1	13	13	2.62	Recoil	1460	750	725	76kg	849g	1	2
MG 4000 SD-5/ES-RT	4	3.2	95	70	Kohler/ Lombardini	15LD350 (Stage 5)	3000	Air	1	13	13	2.62	Electric	1460	750	725	84kg	97kg	1	2

* MG 3000 SD-5/ES-RT and MG 4000 SD-5/ES-RT only



Vandal Proof //

Generator Container



Safely secure power generation from vandalism and theft

Suitable for: **10-100kVA Generators**



Don't be tempted to provide a poor level of service by installing or fitting a site generator into a standard steel container, as without suitable ventilation, air circulation, hot air ducting and restricted maintenance access the results will be disastrous!

A Vandal Proof Generator Container from MHM is the easiest and simplest way to provide your customer a safe and secure power generation solution utilising a standard site generator. This hassle free simple solution will protect the site generator from vandalism, fuel theft and equipment theft along with protecting the site and environment from fluid spillages.

Features

- Dimensions – 12ft (l) x 9ft (w) x 8ft (h)
- Large easy access lockable front doors
- Easy access lockable side door
- 4 x large lashing ring / anchor points
- 2 x fully adjustable internal cross members
- Anti-spy & anti-vandal power cable entry/exit point
- Fully vented and breathable design
- Multiple size exhaust outlet points
- 1800 litre ADR approved removable internal base fuel tank
- Fully bunded base
- 4 x large fork pockets & 4 x lifting eyes

Benefits

- One universal size suitable to house most brand generators from 10 to 100kVA
- Simply lift a generator in and out with ease "via forklift, telehandler or hiab"
- To allow quick and simple cabin entry for service inspection and maintenance
- Simply secure the generator in position with ratchet straps if required
- Adjust the cross members to match the generator size to safety secure in position
- Simply run power cables in and out of container with ease
- Plenty of cool air circulation and hot air ducting to ensure safe running of the generator
- Suitable for a variety of exhaust diameters for various generator brands
- No need for external fuel tank/ bowser for an extended runtime. Plus, cabin can be safety transported full of diesel and fuel tank can be easy removed for inspection, testing, maintenance and cleaning.
- To retain all split fluids
- For nice and easy manoeuvrability, transport and storage

Specification

Dry Weight (No Fuel)	Wet Weight (Fuel Full)	Fuel Tank capacity
3550 kg	4490 kg	1800 Litres

External Dimensions	Internal Dimensions	Door Clearance
Length = 3660 mm; Width = 2500 mm; Height = 2750 mm	Length = 3550 mm; Width = 2320 mm; Height = 2220 mm	Height = 2000 mm; Width = 2800 mm

Generator Accessories //

Generator Trailers

Designed in the UK
Built in Italy



When looking for a robust, reliable, good quality single axle trailer chassis suitable for most brands of generators and other static plant such as tanks, pumps, compressors and other, look no further than the MHM Trailer range.

RT1 – 750kg
Single Axle
Unbraked Trailer


Maximum towable weight of
750kg



Optional extras: Pin hitch

Suitable for most brands of generator up to **15kVA**, including the following MHM models:

STAGE 5 ENGINE	STAGE 3 ENGINE
MG 6000 S5Y-5-ECO	MG 6000 SSK
MG 6000 S5Y-5	MG 8000 SSK
MG 6000 E/S5Y-5	MG 10000 SSK-ECO
MG 8000 SSKH-5	MG 10000 SSK
MG 10000 SSKH-5-ECO	MG 10000 SSK-3PH
MG 10000 SSKH-5	MG 15000 SSK-MV
MG 10000 SSKH-5-3PH	
MG 15000 S5Y-5-MV	

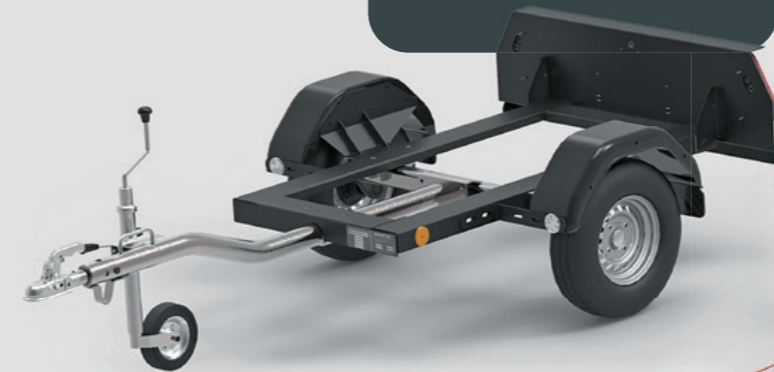

RT2 – 1300kg
Single Axle
Braked Trailer


Maximum towable weight of
1300kg



Optional extras: Pin hitch

Suitable for most brands of generator up to **25kVA**, including the following MHM models:

STAGE 5 ENGINE	STAGE 3 ENGINE
MGTP 16 S5Y-5-MV	MGTP 16 SSK-MV
MGTP 20 S5Y-5-MV	MGTP 16 S5Y-MV
MGTP 25 S5Y-5-MV	MGTP 20 SSK-MV
	MGTP 20 S5Y-MV
	MGTP 25 SSK-MV
	MGTP 25 S5Y-MV

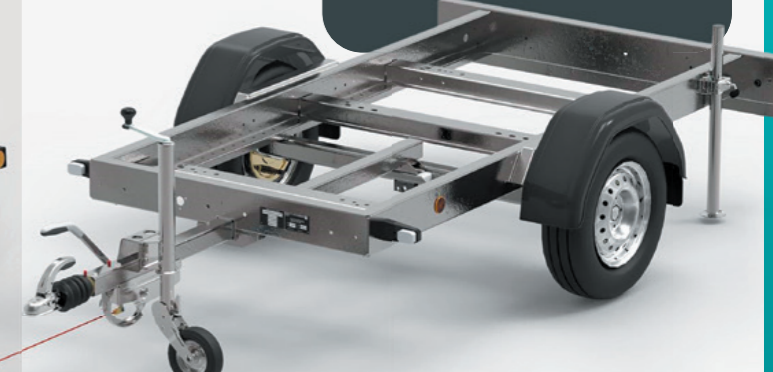

Features

- Ready for work rolling chassis
- Towable chassis is fully certified and approved and is recorded on a data base in accordance with Regulation 2007/46/EC
- Open frame design
- The design is approved for various load fastening variations
- Chassis is complete with mudguards, brakes and rear lights

Benefits

- Simply load and secure your equipment and go
- No further testing or certification is required as the standard issue certification satisfies all the elements of trailer legislation and chassis can be legally and safely towed with, or without a payload
- Simply fasten and secure your generator or equipment on and off the chassis with ease
- Choose from ratchet straps or nut and bolts fasteners as both are acceptable
- Trailer is suitable for UK and Ireland highway use

Model	Tow Hitch Type	Wheel Quantity	Wheel Size	Tyre Size	Suspension	Brakes	Handbrake	Breakaway Cable	Jockey Wheel	Mudguards	Tail Lights	Dimensions				Weights (kg)		
												L	W	H	Max. Bed Area	Trailer Weight	Max. Load/ Bed Weight	Max. Gross Vehicle Weight (GVW)
RT1 – 750kg	Ball	2	10 Inch	145/80 R10	Yes	No	No	No	Yes	Yes	Yes	2650	1300	700	815	135	615	750
RT2 – 1300kg	Ball	2	14 Inch	165 R14 C	Yes	Yes	Yes	Yes	Yes	Yes	Yes	3310	1624	700	1900	230	1070	1300

Specification



Generator Accessories //

Generator Trailers

Designed in the UK
Built in Italy



When looking for a robust, reliable, good quality single or twin axle trailer chassis suitable for most brands of generators and other static plant such as tanks, pumps, compressors and other, look no further than the MHM Trailer range.

RT3 – 1800kg
Single Axle
Braked Trailer

Maximum towable weight of
1800kg

Suitable for most brands of generator up to **50kVA**, including the following MHM models:

STAGE 5 ENGINE **STAGE 3 ENGINE**
MGTP 33 SSY/5 MGTP 33 SSF
MGTP 45 SSY-5 MGTP 45 SSF



Optional extras: Pin hitch

RT4 – 3500kg
Twin Axle
Braked Trailer


Maximum towable weight of
3500kg

Suitable for most brands of generator up to **100kVA**, including the following MHM models:

STAGE 5 ENGINE **STAGE 3 ENGINE**
MGTP 60 SSKH-5 MGTP 60 SSF
MGTP 100 SSKH-5 MGTP 100 SSF



Optional extras: Pin hitch

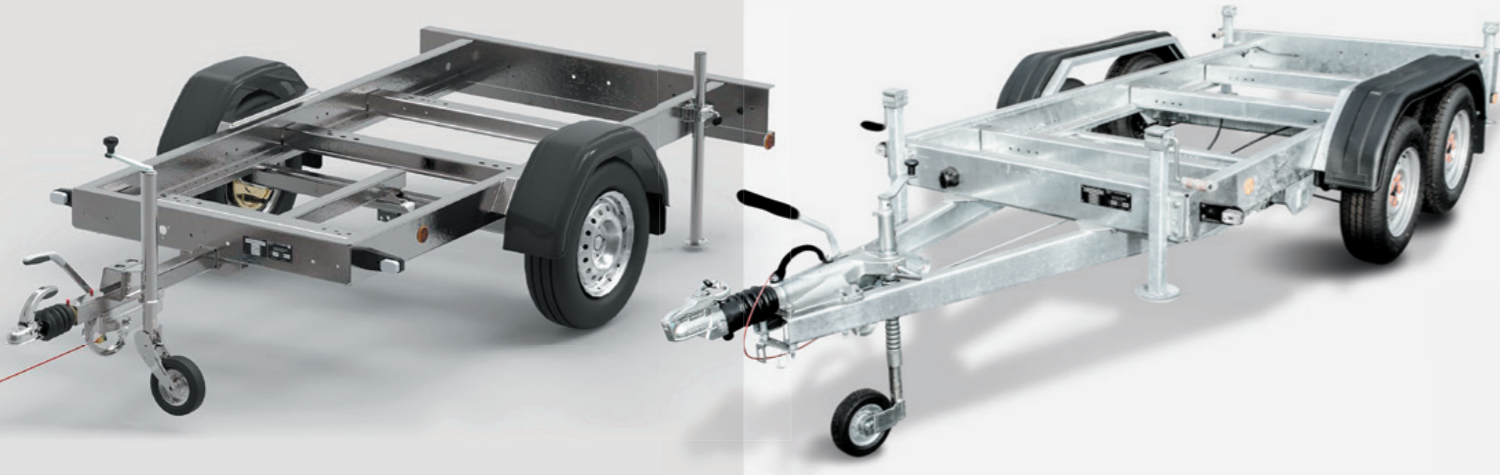

Features

Ready for work rolling chassis

Towable chassis is fully certified and approved and is recorded on a data base in accordance with Regulation 2007/46/EC

Open frame design

The design is approved for various load fastening variations

Chassis is complete with mudguards and rear lights

Benefits

Simply load and secure your equipment and go

No further testing or certification is required as the standard issue certification satisfies all the elements of trailer legislation and chassis can be legally and safely towed with, or without a payload

Simply fasten and secure your generator or equipment on and off the chassis with ease

Choose from ratchet straps or nut and bolts fasteners as both are acceptable

Trailer is suitable for UK and Ireland highway use

Generator Accessories //

EV Charging

Designed in the UK
Built in Italy



When looking for a robust, reliable, good quality temporary site ready electric vehicle charger, our MHM EVC - 2 has everything the hire market requires.



MHM EVC - 2

Ready to Rent Electric Vehicle Charger

Optional extras: 32A 3ph input

63A 1ph input

Features Benefits

2x Type-2 EV charge sockets

Simple plug and play design

Portable light weight, free standing and c/w carry handle

LED status indicators

Linkable connectivity

Charge up to 2 x electric vehicles at the same time

Set up in minutes


Easy to deploy, transport and store

For ease of operators use:
Blue LED on = Power
Green LED on = Charging
Red LED on = Error

Link up to 3 units from one power source totalling 6 charge points



Linkable to max. of 3 = 6 EV charge points

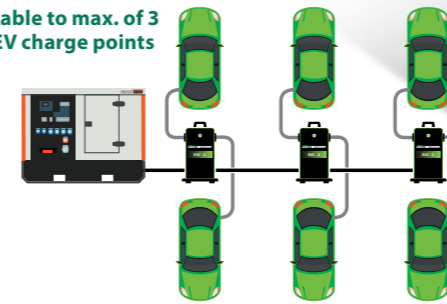

Specification

Model	Tow Hitch Type	Wheel Quantity	Wheel Size	Tyre Size	Suspension	Brakes	Handbrake	Breakaway Cable	Jockey Wheel	Mudguards	Tail Lights	Dimensions				Weights (kg)		
												L	W	H	Max. Bed Area	Trailer Weight	Max. Load/ Bed Weight	Max. Gross Vehicle Weight (GVW)
												(mm)						
RT3 – 1800kg	Ball	2	14 Inch	185 R14 C	Yes	Yes	Yes	Yes	Yes	Yes	Yes	3810	1770	740	2700	300	1500	1800
RT4 – 3500kg	Ball	4	14 Inch	185 R14 C	Yes	Yes	Yes	Yes	Yes	Yes	Yes	4800	1840	825	4100	580	2920	3500

Performance

Output	Dual 7.4 Kw	On / Off switch / Isolator	Yes
Output protection	Yes	Phase sector switch	to balance phases during set up
Max electric vehicles	2 vehicles	High / Low power mode switch	Yes, key controlled
Charge socket	Type-2 c/w locking pin	High power mode	1 ph - 7.4 kw
Cooling	Air	Low power mode	1 ph - 3.6 kw
IP rating	54		

Dimensions (Machine only)

Depth: 180 mm Width: 350 mm Height: 710 mm Weight: 14 kg

Output socket configuration	Type-2 EV charge socket
MHM EVC - 2	2
Input socket configuration	3ph (400v) 63A
MHM EVC - 2	1

Specification



Site Distribution Boxes // C/E Range

When looking for a robust, reliable, good quality generator site electrical distribution box – suitable for most construction or event site applications – look no further than our MHM Distrobox C/E range.



Site Distribution Boxes // W Range

When looking for a robust, reliable, good quality generator site electrical distribution box – suitable for most welfare cabin set up applications – look no further than our MHM Distrobox W range.



MHM-Distrobox 1-C/E
32A 3ph (400V) Site Electrical Distribution Box

MHM-Distrobox 2-C/E
63A 3ph (400V) Site Electrical Distribution Box

MHM-Distrobox 3-C/E
125A 3ph (400V) Site Electrical Distribution Box

MHM-Distrobox 1-W
32A 3ph (400V) Site Electrical Distribution Box

MHM-Distrobox 2-W
63A 3ph (400V) Site Electrical Distribution Box

MHM-Distrobox 3-W
125A 3ph (400V) Site Electrical Distribution Box

Suitable for: **10–25kVA Generators**

Suitable for: **30–50kVA Generators**

Suitable for: **60–160kVA Generators**

Suitable for: **10–25kVA Generators**

Suitable for: **30–50kVA Generators**

Suitable for: **60–160kVA Generators**



Features

Simple plug & play connectivity

Heavy duty, hard and durable IP rated thermoplastic polyurethane box

Carry handles, interlockable and stackable design

Full protection on the inlet and all outlet sockets

Neon light indicators on all inlets and outlets

Benefits

Easy to manage for most construction or event site applications

Shock, weather proof, lightweight and long lasting

Perfect for safe transportation and storage

Reduces risk of overloading or overheating and ensures safe operation

For quick, simple and easy trouble-shooting on site



VARIOUS POWER CABLES AVAILABLE

Contact MHM for details

Features

Simple plug & play connectivity

Heavy duty, hard and durable IP rated thermoplastic polyurethane box

Carry handles, interlockable and stackable design

Full protection on the inlet and all outlet sockets

Neon light indicators on all inlets and outlets

Benefits

Easy to manage for most site cabin applications

Shock, weather proof, lightweight and long lasting

Perfect for safe transportation and storage

Reduces risk of overloading or overheating and ensures safe operation

For quick, simple and easy trouble-shooting on site



VARIOUS POWER CABLES AVAILABLE

Contact MHM for details

Model	Protection			Dimensions – machine only (mm)			Weight	Input plug			Output socket configuration			
	3ph (400V) Input	3ph (400V) Output	1ph (230V) Output	L	W	H		3ph (400V)			3ph (400V)		1ph (230V)	
								125A	63A	32A	63A	32A	32A	16A
MHM-Distrobox 1-C/E	Protected by C-rated 32A 4 pole MCB	Outlet protected by an individual C-rated 4 pole MCB	All outlets protected by 2 pole 30mA C-rated RCBOs	560	350	340	6kg	–	–	1	–	1	3	3
MHM-Distrobox 2-C/E	Protected by C-rated 63A 4 pole MCB	All outlets protected by individual 100mA RCD & C-rated 4 pole MCB	All outlets protected by individual 2 pole 30mA C-rated RCBOs	600	400	540	12kg	–	1	–	1	1	6	3
MHM-Distrobox 3-C/E	Protected by C-rated 125A 4 pole MCB	All outlets protected by individual 100mA RCD & C-rated 4 pole MCB	All outlets protected by individual 2 pole 30mA C-rated RCBOs	600	400	670	24kg	1	–	–	1	2	12	6

Model	Protection			Dimensions – machine only (mm)			Weight	Input plug			Output socket configuration			
	3ph (400V) Input	3ph (400V) Output	1ph (230V) Output	L	W	H		3ph (400V)			3ph (400V)		1ph (230V)	
								125A	63A	32A	63A	32A	63A	32A
MHM-Distrobox 1-W	Protected by C-rated 32A 4 pole MCB	Outlet protected by an individual C-rated 4 pole MCB	All outlets protected by 2 pole 30mA C-rated RCBOs	650	350	340	6kg	–	–	1	–	1	–	6
MHM-Distrobox 2-W	Protected by C-rated 63A 4 pole MCB	All outlets protected by individual 100mA RCD & C-rated 4 pole MCB	All outlets protected by individual 2 pole 30mA C-rated RCBOs	600	400	540	12kg	–	1	–	1	1	3	6
MHM-Distrobox 3-W	Protected by C-rated 125A 4 pole MCB	All outlets protected by individual 100mA RCD & C-rated 4 pole MCB	All outlets protected by individual 2 pole 30mA C-rated RCBOs	780	400	670	25kg	1	–	–	1	2	6	12



Fly Leads



When looking for a robust, reliable, good quality stepdown fly lead, look no further than our MHM Fly Lead range.

MHM-Fly Lead - 16A

16A 1ph (230V) site electrical stepdown fly lead to 12 x 13A domestic household sockets



MHM-Fly Lead - 32A

32A 1ph (230V) site electrical stepdown fly lead to 12 x 13A domestic household sockets



Features

- Simple plug & play connectivity
- Heavy duty, hard and durable IP rated box
- Carry handle and lightweight
- Linkable design
- Neon light power indicator

Benefits

- Easy to manage for any rental application
- Shock, weather proof and long lasting
- Perfect for easy handling and storage
- Link a quantity in series
- For quick, simple and easy trouble-shooting on site

Model	Dimensions – box only (mm)			Weight	Input Plug (1m Lead)		Output Sockets		
	L	W	H		1ph (230V)		1ph (230V)		
					32A	16A	32A	16A	13A
MHM-Fly Lead - 16A	455	160	100	5kg	-	1	-	1	12
MHM-Fly Lead - 32A	455	160	100	5kg	1	-	1	-	12

Other Fly Leads available – please contact for details	
125A to 63A 3ph-400V	125A 3ph (400V) plug to 63A 3ph (400V) socket step-down 1m fly lead
63A to 32A 3ph-400V	63A 3ph (400V) plug to 32A 3ph (400V) socket step-down 1m fly lead
32A to 16A 1ph-230V	32A 1ph (230V) plug to 16A 1ph (230V) socket step-down 1m fly lead
32A to 16A 1ph-110V	32A 1ph (110V) plug to 16A 1ph (110V) socket step-down 1m fly lead
Fly Lead - 16A – 4 x 13A	16A 1ph (230V) site electrical step-down fly lead to 4 x 13A domestic household sockets
Fly Lead - 16A – 2 x 13A	16A 1ph (230V) site electrical step-down fly lead to 2 x 13A domestic household sockets
Fly Lead - 16A – 1 x 13A	16A 1ph (230V) site electrical step-down fly lead to 1 x 13A domestic household sockets

Site Transformers



When looking for a robust, reliable, good quality site transformer, look no further than our MHM Distrobox range – ideal for use on construction sites.

MHM-3kVA Transformer

3kVA Site Transformer



MHM-3.3kVA Transformer

3.3kVA Site Transformer



MHM-5kVA Transformer

5kVA Site Transformer



MHM-10kVA Transformer

10kVA Site Transformer



Features

- Simple plug & play connectivity
- Heavy duty, hard and durable IP rated box
- Carry handles
- Cut-out protection
- Manufactured to BS Standards

Benefits

- Easy to manage for any rental application
- Shock, weather proof and long lasting
- For easy handling
- Reduces risk of overloading or overheating and ensures safe operation
- Safe for UK sites

Model	Power Rating		Continuous Rating		Frequency (Hz)	Maximum Tool Wattage (W)	Protection	Dimensions – box only (mm)			Weight	Input Plug c/w 2m Cable		Output Sockets		Output Hard Wire Terminals
	kVA	kW	kVA	kW				L	W	H		1ph (230V)		1ph (110V)		32A
												32A	16A	32A	16A	
MHM-3kVA Transformer	3	2.4	1.5	1.2	50	1500	10A	190	240	260	17kg	-	1	-	2	-
MHM-3.3kVA Transformer	3.3	2.6	1.65	1.3	50	1650	10A	190	240	260	18.5kg	-	1	1	1	-
MHM-5kVA Transformer	5	4	2.7	2.2	50	2700	15A	315	355	275	36kg	-	1	1	2	-
MHM-10kVA Transformer	10	8	5	4	50	5000	8 x MCBs	500	430	440	85kg	1	-	2	4	2

Specification

Specification



Load Banks



When looking for an essential piece of generator test equipment, designed to offer portable, easy, simple and efficient voltage, frequency and amperage load testing of a generator, look no further than our MHM Load Bank range

MHM Load Tester 1

6kVA Generator Portable Tester Only

Tests up to: **6kVA**



IMPORTANT NOTE:

This is a tester only. A load needs to be applied to run a full generator test.

To load the generator for testing, hire fleet equipment can be used, such as fans, heaters, blowers or other.

MHM Load Bank 2

7.5kVA Generator Portable Load Bank

Tests up to: **7.5kVA**



IMPORTANT NOTE: This load bank will load and test the generator. No further equipment is required.

MHM Load Bank 3

38kVA Generator Portable Load Bank

Tests up to: **38kVA**



MHM Load Bank 4

125kVA Generator Portable Load Bank

Tests up to: **125kVA**



Features

Tests loads up to 125kVA/100kW in 400V (3ph) and 230/110V (1ph)

Tester / Load Banks display voltage (v), frequency (Hz) & amperage (A) under both load and no-load conditions

Portable units, complete with handles

Plug and play connectivity

Benefits

Ideal to load and test a fleet of generators

Allows test engineer to ensure correct setting of generator

Ideal for workshop or mobile engineer

Load Tester & Banks come complete with generator to load bank test leads

HVO RENEWABLE DIESEL

Reduce your carbon emissions by **90%** when using HVO Fuel as opposed to traditional diesel

100% SUSTAINABLE

100% CARBON OFFSET

100% RENEWABLE FUEL



CLEANER, GREENER FUEL ALTERNATIVE

HVO fuel is fully compatible & approved on all our diesel engine driven **Power & Lighting** product and our **Fuel Storage Range**.

MHM working in conjunction with Crown Oil



WHAT IS HVO?

HVO (Hydrotreated Vegetable Oil) is a premium quality fuel made from 100% renewable raw materials.

The FAME-free fuel is **compatible, approved and safe to use** as an alternative replacement fuel to traditional fossil fuel diesel in all of MHM's engine driven **Power, & Site Lighting** equipment along with our **Fuel Storage Range**.

Using HVO fuel produces **net-zero carbon emissions, significantly reducing your carbon footprint.**

Features

HVO is a direct replacement for regular diesel – no need to modify or adjust the engine or filters

HVO can be mixed with regular diesel in any ratio or quantity

Safely store for a longer period – **up to 10 years** – in comparison with regular diesel, reducing site activity, breakdowns and fuel testing

HVO provides better starting, clean combustion and less chance of waxing and water retention in extreme temperatures

Benefits

Reduce your carbon emissions by 90% Today!

Hassle-free usability and practicality

Extended shelf life

Excellent cold weather and all year around performance

Model	Three Phase Power (400V)		Single Phase Power				Dimensions – machine only (mm)			Weight	Socket configuration				Test leads configuration				
			230V		110V						3ph (400V)	1ph (230V)		1ph (110V)	3ph (400V)	1ph (230V)		1ph (110V)	
	kVA	kW	kVA	kW	kVA	kW	L	W	H		63A	63A	16A	16A	63A	63A	32A	32A	16A
MHM Load Tester 1	N/A	N/A	6	4.8	6	4.8	280	260	320	3.5kg	–	–	2 x Socket	2 x Socket	–	–	1 x Plug	–	1 x Plug
MHM Load Bank 2	N/A	N/A	7.5	6	7.5	6	495	220	550	12kg	–	–	–	–	–	–	1 x Plug	1 x Plug	–
MHM Load Bank 3	38	30	19	15	N/A	N/A	840	400	560	30kg	1 x Plug	1 x Plug	–	–	1 x Plug + 1 x Socket	1 x Plug + 1 x Socket	–	–	–
MHM Load Bank 4	125	100	35	28	9	7	1040	670	940	123kg	Hardwire	Hardwire	Hardwire	–	–	–	–	–	–

Product

Hydrotreated Vegetable Oil (HVO)

Use

Diesel engine only (Kubota, Yanmar, Kohler & Iveco)

Standard

BS EN 15940:2016*

Appearance

Clear and bright

* HVO fuel **MUST** meet the above standard only, failure to use any biofuels **NOT** to this standard may result in engine failure, which will **NOT** be covered by the engine manufacturers warranty and will remain chargeable in full to the user.



Also available //
Additional Products

Notes

FLUID STORAGE



SITE LIGHTING



WELDING



A series of horizontal dotted lines for taking notes, spanning the right side of the page.





Mat Llewellyn
Managing Director

Mob: +44 (0)7807 275090
Email: info@mhm-group.co.uk



Brad Ireland
Group Sales Director – UK, Ireland and Export

Mob: +44 (0)7807 275086
Email: info@mhm-group.co.uk



David Mallon
National Sales Manager
– Key Accounts & Innovation

Mob: +44 (0)7376 005820
Email: davidmallon@mhm-group.co.uk



Mike Grant
Business Development Manager
– Scotland

Mob: +44 (0)7961 059064
Email: mikegrant@mhm-group.co.uk




Gregg Taylor
Business Development Manager
– Midlands, Wales and South West

Mob: +44 (0)7597 670477
Email: gregg@mhm-group.co.uk



Richard Burchell
Business Development Manager
– Northern England

Mob: +44 (0)7376 005822
Email: richardburchell@mhm-group.co.uk



Megan Rand
Internal Sales Executive

Mob: +44 (0)7939 017614
Email: sales@mhm-group.co.uk

National **UK & IRELAND** Coverage

For more information call **MHM TODAY** on:

+44 (0)808 168 9099

TALK TO US ON WHATSAPP +44 (0)7939 017614

Or email: sales@mhm-group.co.uk
or rehire@mhm-group.co.uk

